

## Description

Lightweight and able to take any form, the Anakonda-KAN200 is a truly revolutionary speaker. This loudspeaker is a 2-meter long with 8 x 1" with P.A.T (Pure array Technology) and a max power of 300W at 64Ω. Integrated male and female Speakon NL4 connectors hide all connections inside the body of the speaker.

By using two amplifier channels with the dedicated K-ANLINK accessory, you can extend your Anakonda system up to 32 units -64 meters - which creates an elegant, seamless line of continuous sound. Its dedicated presets work on a wide frequency range and can be used as an audio system in combination with K-array subwoofers.

Anakonda's serpentine's form can adapt to any kind of furniture, thanks to the newest endowment accessories to mount it on walls, sides, pavements. This important characteristic make this piece a particular equipment for its design in many places like retails, venues (very useful in invisible but powerful reinforcements), and home solutions.

- Sinuous line array element
- Possible to connect with other KAN200 elements with K-ANLINK accessory
- 8 x 1" Neodymium magnet woofers
- Frequency Response of 150 Hz - 18kHz (-6 dB)
- Rated power of 150 W
- Coverage of V. 10° | H. 140°
- PVC/Neoprene, black, white colors
- IP64 rating and dedicated waterproof accessory.



# Anakonda-KAN200

## Technical specifications

|                                 |                                               |
|---------------------------------|-----------------------------------------------|
| Type                            | Line array                                    |
| Transducers                     | 8 x 1" Neodymium magnet woofers               |
| Frequency Response <sup>1</sup> | 150 Hz - 18kHz (-6 dB)                        |
| Max SPL <sup>2</sup>            | 102 dB (peak)                                 |
| Coverage                        | V. 10°   H. 140°                              |
| Power handling                  | 150 W                                         |
| Nominal Impedance               | 64Ω                                           |
| Connectors                      | SpeakOn NL4 1+ 1- (signals) ; 2+ 2- (through) |


## Handling & Finishes

|                        |                                                                         |
|------------------------|-------------------------------------------------------------------------|
| Material               | PVC/Neoprene                                                            |
| Colors                 | Black, White                                                            |
| IP Rating              | IP64 <sup>3</sup>                                                       |
| Dimensions (W x H x D) | (W x H x D) : 2000 (±20mm) x 56 x 35 mm (79.5 (±0.8 in) x 2.2 x 1.4 in) |
| Weight                 | 1.4 kg (3.1 lb)                                                         |

<sup>1</sup> With dedicated preset.

<sup>2</sup> Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 8 m then scaled at 1 m.

<sup>3</sup> More complete water protection with K-IP65KITB accessory (IP65 compliant).

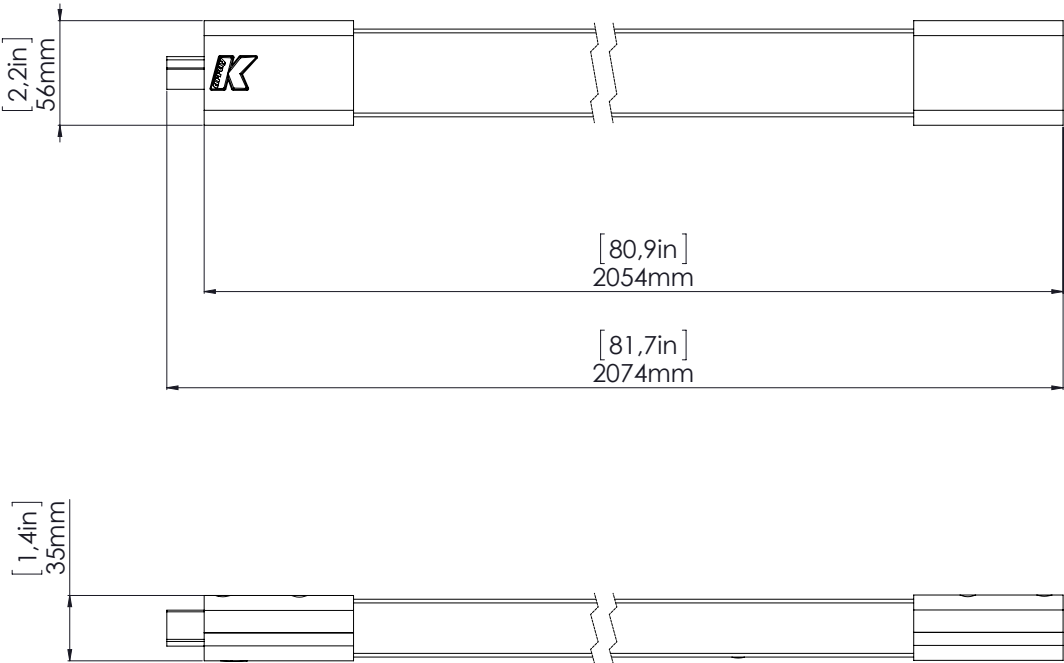

Notes:  
Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.  
New materials and designs are introduced into existing products without previous notice.  
Present systems may differ in some respects from those presented in this catalog.

