


Commercial Display Quick Start Guide

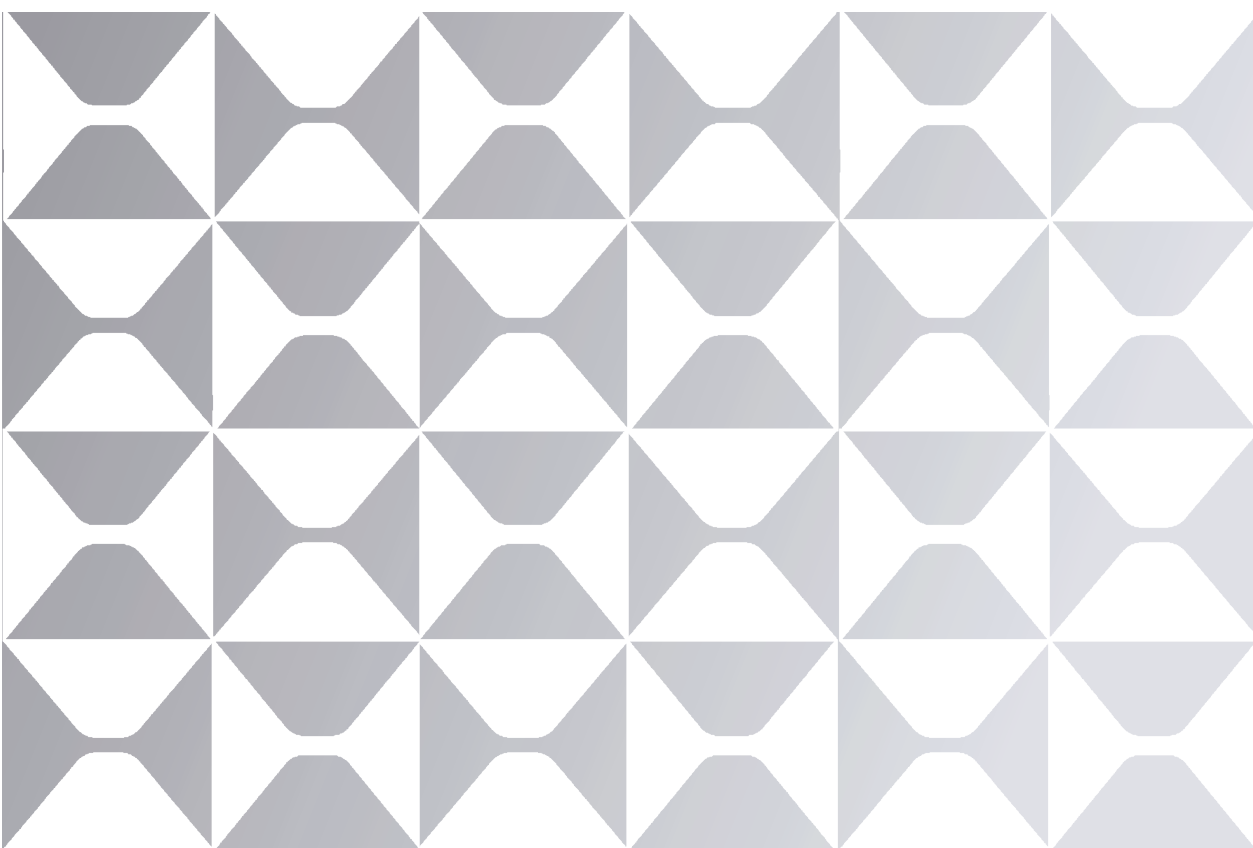

MAXHUB

All the pictures in this manual are for reference only, subject to our available products.

TABLE OF CONTENTS

Contents	01
I. Unboxing Checklist	04
II. Installation Guide	04
1. Confirm the panel installation position	04
2. Steps to install the wall mount	06
3. Reference on wall mount	07
III. Installing the WiFi Module	08
IV. Installing the OPS Module	09
V. Removing the OPS Module	10
VI. Power On/Off	10
VII. Control Panel	11
1. Prepare to install	11
2. Terminal interface	12
3. Remote control	13
IX. Wired Screen Share From Your Laptop to the Display	14
X. Frequently Connected Ports	15
XI. First Start of MAXHUB Commercial Display	16
XII. Maintenance	16

Thank you for choosing MAXHUB product.

To ensure that you are able to fully utilize the capabilities of the product, we ask that you please read this QSG carefully and thoroughly before using the device. Should you have any questions or require assistance, please do not hesitate to contact our technical support team for guidance.

Safety Warnings

Placement

- (1) Please do NOT place the product on a slope, mount on an unstable stand or an insufficiently robust wall, a table nor a shelf.
- (2) Please do NOT expose the product to direct sunlight or any other heat source.
- (3) Please do NOT put the product near devices that generate strong magnetic fields.
- (4) Remove water splashes immediately with a clean dry cloth.
- (5) Please do NOT place any other heavy objects on the product.
- (6) Please do NOT put the unit directly facing an air conditioning vent to avoid condensation inside the glass.

Power Supply

- (1) Please check the product's operating voltage and frequency matches the local power configuration.
- (2) Please unplug the device during storming or thundering weather.
- (3) Please unplug the power should the product is left unused for long time.
- (4) Please keep the power cable from physical or mechanical damage.
- (5) Please use the original power cable from the accessory bag, don't modify or lengthen it.
- (6) Please make sure the AC is grounded.
- (7) This power cable comes with the device exclusively for this device only.
- (8) Please do not abruptly interrupt the power supply or unplug the device while it is powered on to prevent any potential damage.

LCD Screen

- (1) Do NOT use hard nor sharp objects on the screen other than MAXHUB stylus.
- (2) Please unplug the power before cleaning the product. Please clean the screen with a soft, dustless and dry cloth.
- (3) Please do NOT use water or liquid detergent to clean the product.
- (4) Please contact the authorised reseller for thorough cleaning.
- (5) Please do NOT display a high-brightness image on the screen for too long time.

Viewing Distance

For optimal viewing experience, it is recommended to position the commercial display at a distance that is 3-4 times the diagonal length of the screen.

Temperature & Humidity

- (1) Please do NOT put the product near a heater nor a radioactive source.
- (2) If the product is moved from a cold place to a warm one, please unplug the power cable and allow the product to gradually warm up for at least two hours to reduce the moisture.
- (3) Operating temperature of the product is 0°C-40°C, operating humidity is between 0%-90%RH.
- (4) avoid exposing the unit to rain or placing it in high humidity areas. Additionally, it is crucial to keep the unit in a dry and cool indoor environment.

Ventilation

Please ensure that the interactive flat panel is placed in an area with adequate ventilation to allow for proper heat dissipation. It is recommended to leave a minimum of 10cm of space on the left, right, and back of the device, and 20cm of space above it to ensure proper airflow and optimal performance.

Earphone

When using the earphones, it is important to be aware that prolonged listening at high volumes may cause temporary or permanent hearing loss. To prevent this, we strongly recommend turning down the volume before inserting the earphones into your ears.

Energy Saving

Please note that pressing the power button briefly will not fully shut down the interactive flat panel. Instead, it will enter standby mode, with only the screen turning off. To properly shut down the device, press and hold the power button for approximately 3 seconds and confirm the shut down command that appears on the center of the screen.

Notes for Cleaning

Please do not block or cover the heat vents on the back panel and do not spray liquids on the device.

Power Switch Status Signs

"I" means power on, "O" means power off.

Maintenance


Please contact authorised reseller for maintenance or repairing.

Warranty Exclusions


MAXHUB does not warranty Products that match any one or few of the following descriptions:

- (1) Product damage caused by violating the user manual.
- (2) Hardware damage caused by improper setup.
- (3) Product damage caused by unauthorised modification or maintenance.
- (4) Product damage caused by using in an unsuitable environment.
- (5) Product damage caused by abnormal external force.
- (6) Product damage caused by natural disasters or other force majeure.
- (7) Damaged Warranty Sticker.
- (8) Unable to provide effective purchase certificate.


I. Unboxing Checklist




Commercial Display x1




Wall Mounting x1



Quick Start Guide x1



HDMI Cable x1



Remote Control x1



WiFi Module x1




Power Cord* x1

Note: 【*】 Power cord could be different for different regions , pls refer to the actual product.


II. Installation Guide

1. Confirm the panel installation position.

Align the wall-mounted screw holes with the studs on the back panel and fasten with 2 wall-mounted strips. First, fasten the screws on the top side, then fasten the screws on the bottom side. A total of four screws are required. Refer to the table below for the position of the lock hole.

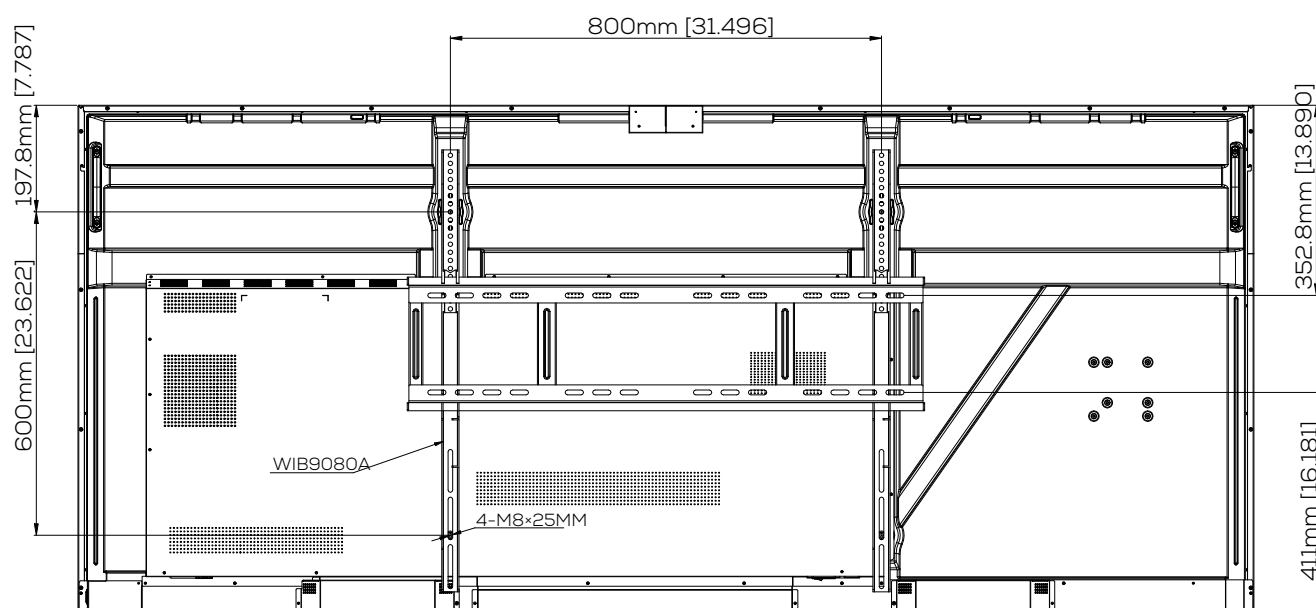


Landscape Mode

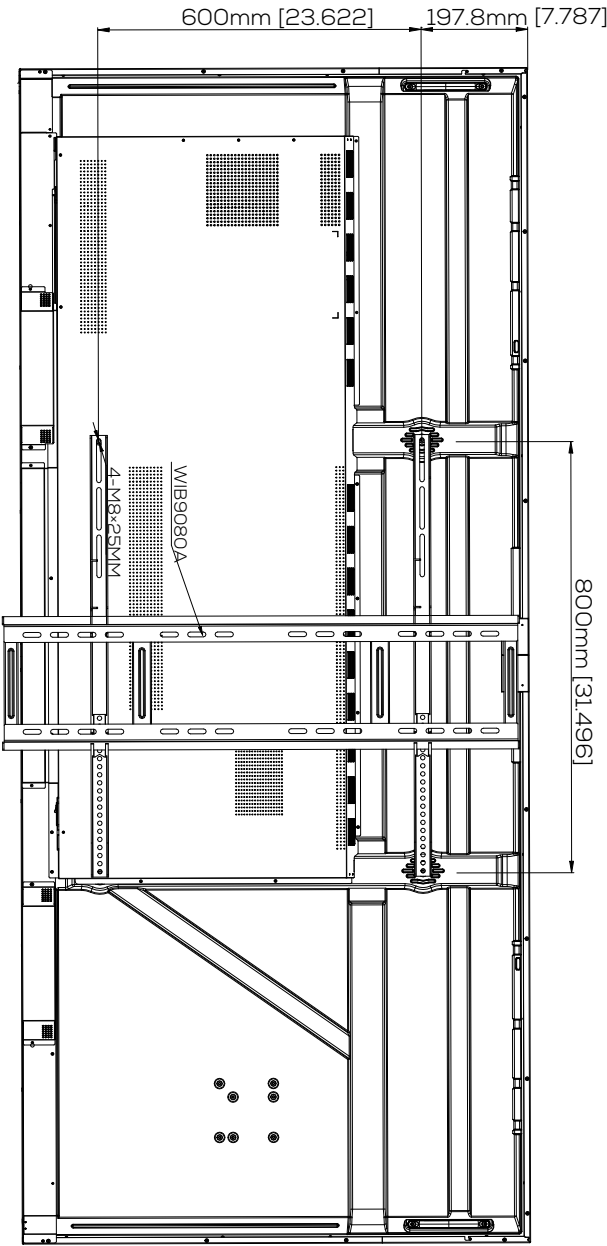


Portrait Mode

2. Steps to install the wall mount


- 1 Take out the wall mount plate accessory package from the accessory box.

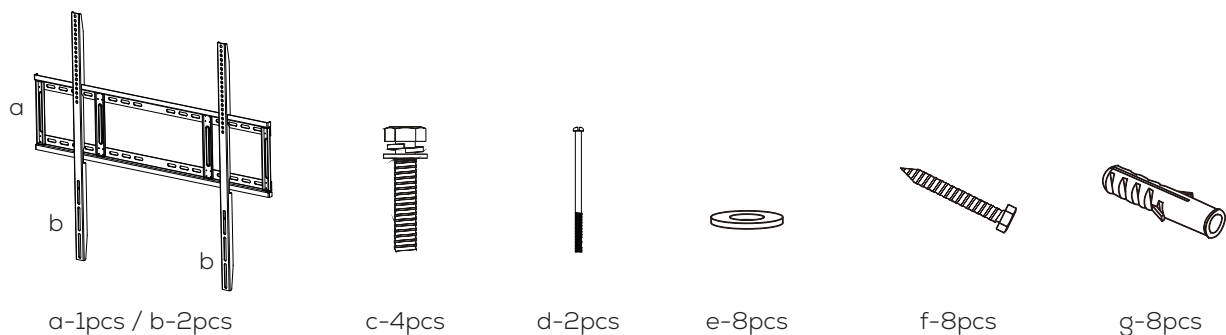


- 2 Take the panel out of the box and place it on a soft surface, such as a mat, to protect it during installation.

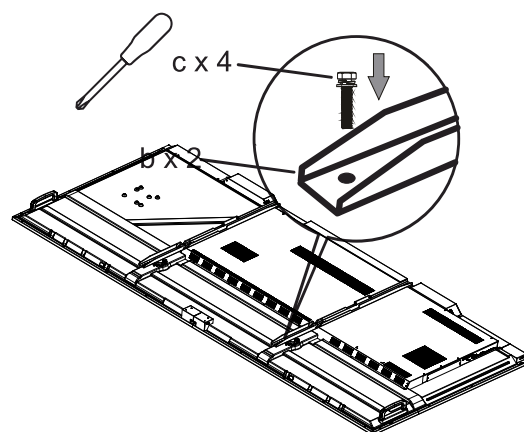


- 3 Take 8 pcs of expansion rubber plug g and screw it into the wall.

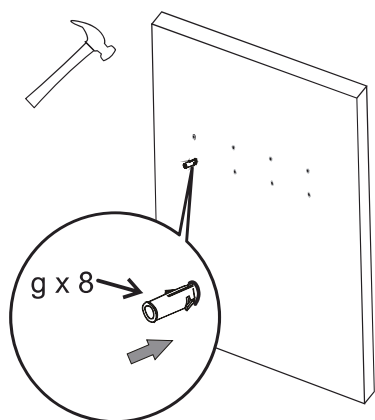


- 4 Fix the wall bracket on 8 pcs expansion plug g with a combination of 8 pcs screw e and gasket f.

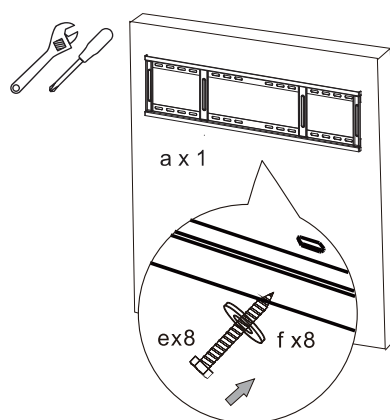

- 5 Hang the panel vertically on the bracket, keep the panel in the center of the bracket.




- 6 Tighten the safety screw counter-clockwise to make the top of screw reach the second screw hole.

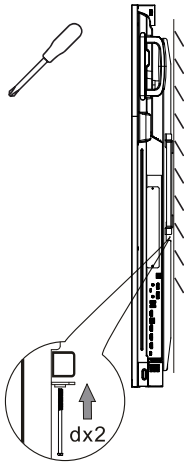

3. Reference on wall mount

When planning for wall mounting, it is important to take into consideration the physical dimensions of the panel. To ensure ease of use, it is recommended to maintain a proper distance between the wall and the back of the panel.

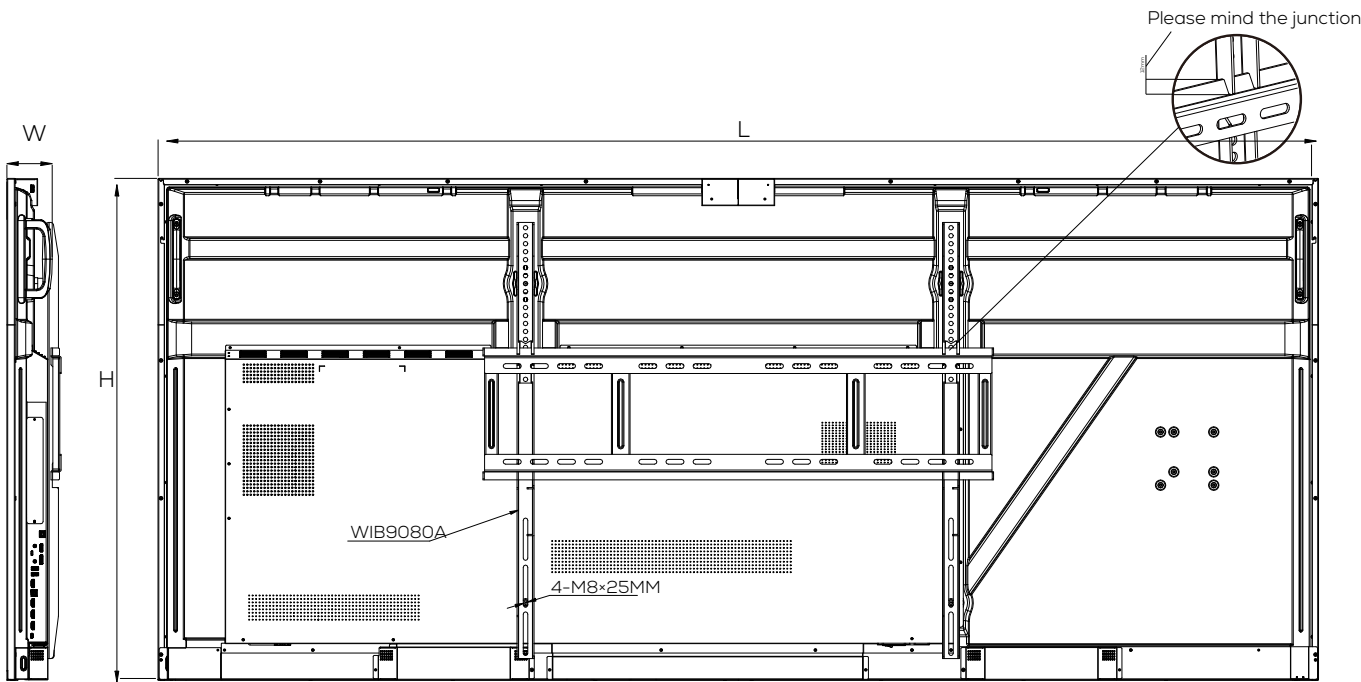

Model	UW92NA		
Dimension	L	H	W
	2360 mm	1072 mm	225 mm

NOTE: The table and diagram are only for reference.

III. Installing the WiFi Module

Please make sure that the following items are ready before setting up the wireless module.

1 × Commercial Display


1 × WiFi Module

⚠ Please make sure the power cord of the Commercial Display is disconnected before installation.

Step1: Use a Phillips screwdriver to loosen two screws and remove the cover.



Step2: Insert the WiFi module into the wireless module slot.

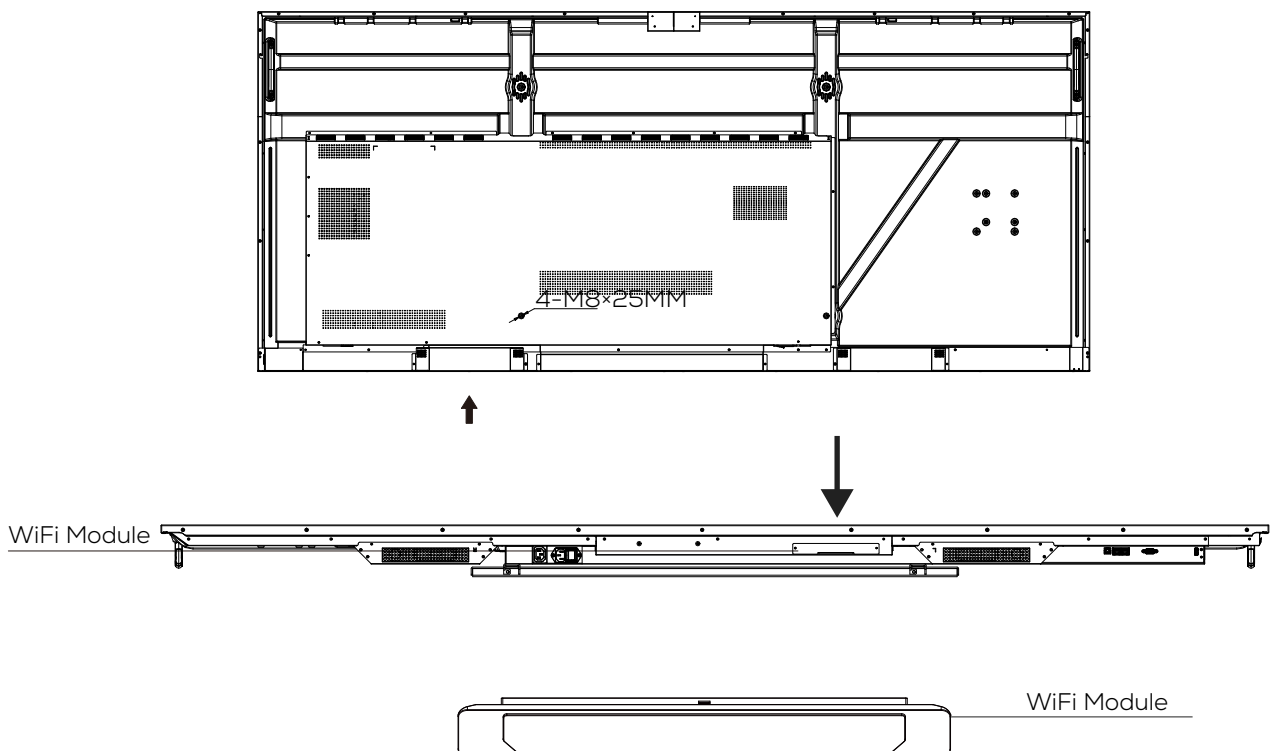

Note: This WiFi Module only works for the Commercial Display by plugging it into the above slot.


IV. Installing the OPS Module

⚠ Please make sure the power cord of the Interactive Display is disconnected before installation.

Step1: Unscrew and remove the cover.




Step2: Prepare the OPS module.




OPS module

Step3: Unscrew and remove the cover.

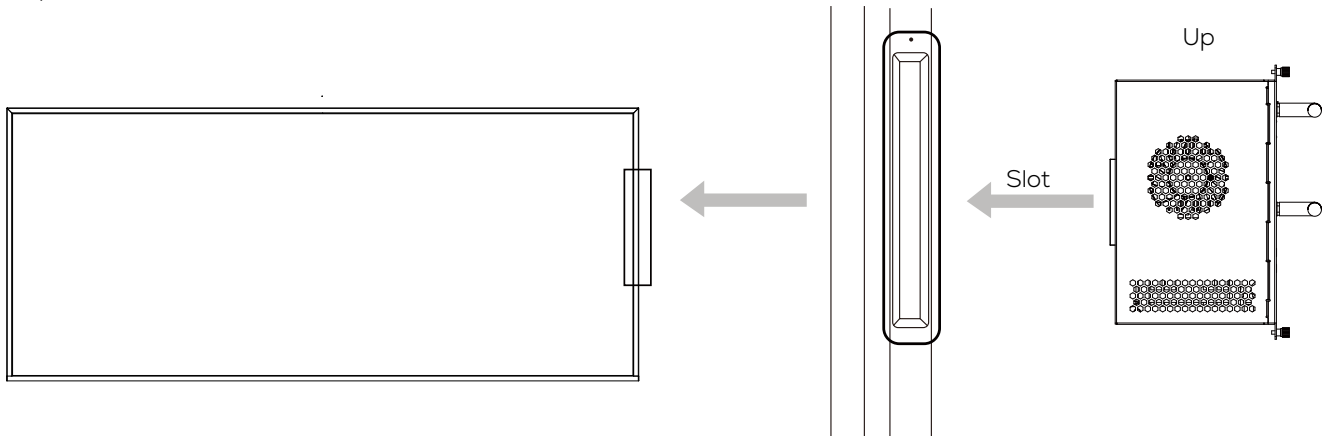


Step4: Installation of OPS module.

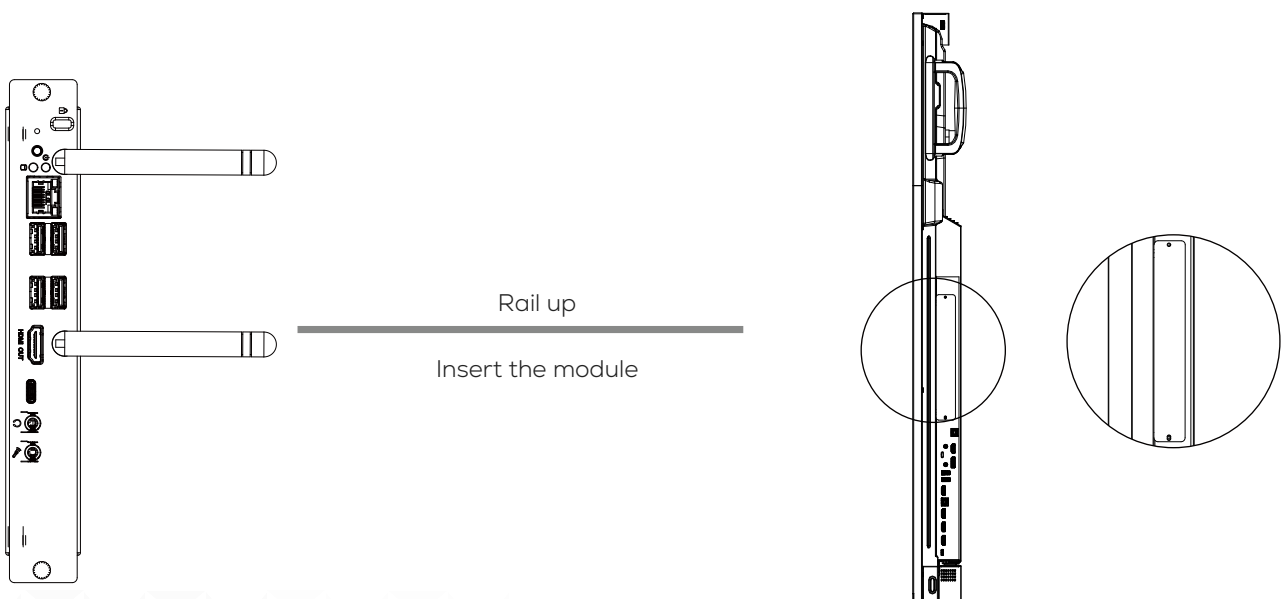


V. Removing the OPS Module

⚠ Please make sure the power is off before proceeding with the removal.

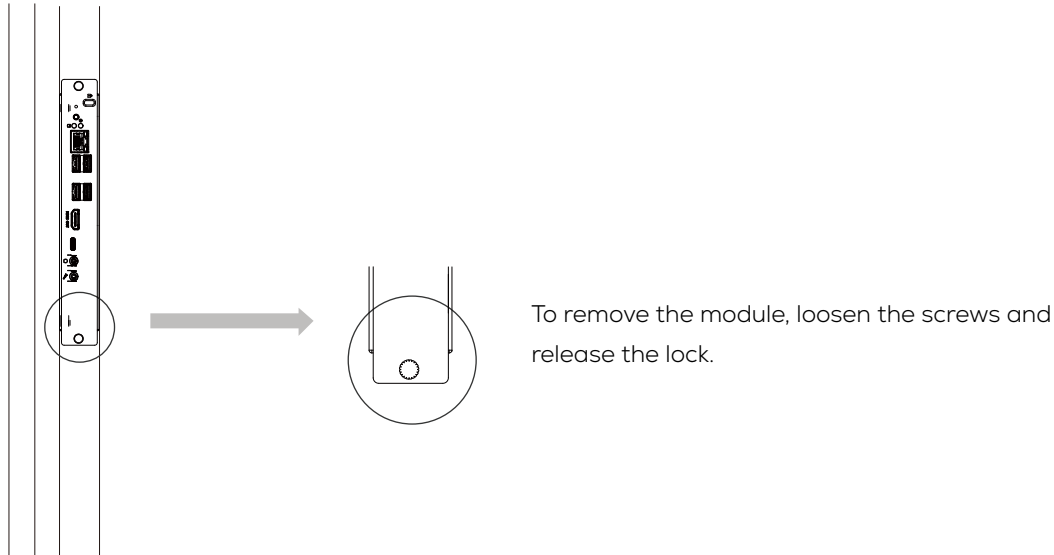

VI. Power On/Off

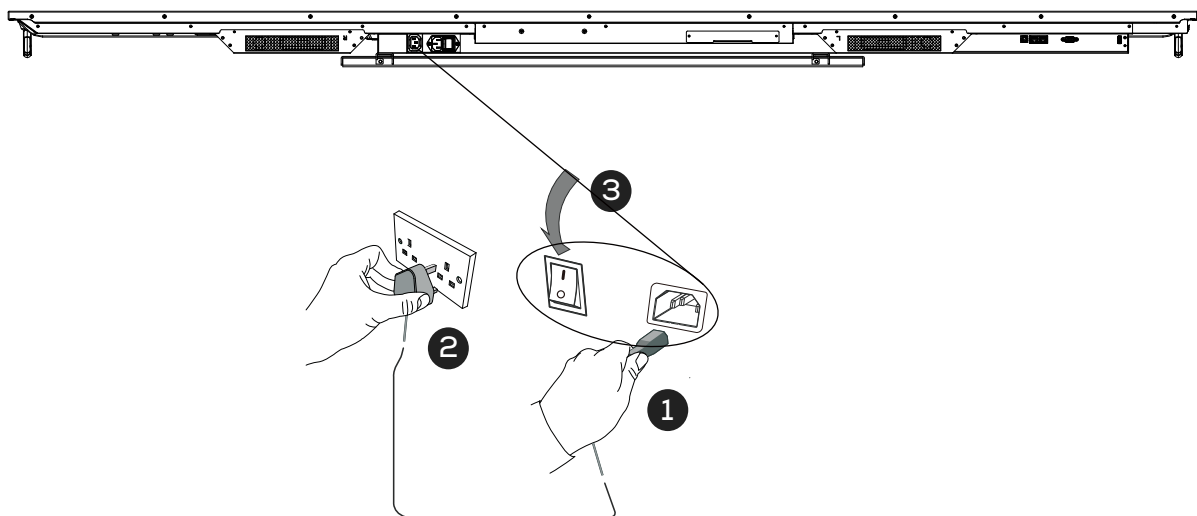


- 1 Plug the power cable into the power socket of the product.
- 2 Plug the power cable into the power supply.
- 3 Flip the rocker switch and press the power button. The indicator light will turn white when the product is powered on.

VII. Control Panel


To ensure the proper functioning of the product, it is important to keep it free of dust and moisture. Regular cleaning with a soft, dust-free, and dry cloth is recommended. Remember to unplug the product before cleaning.

1. Prepare to install

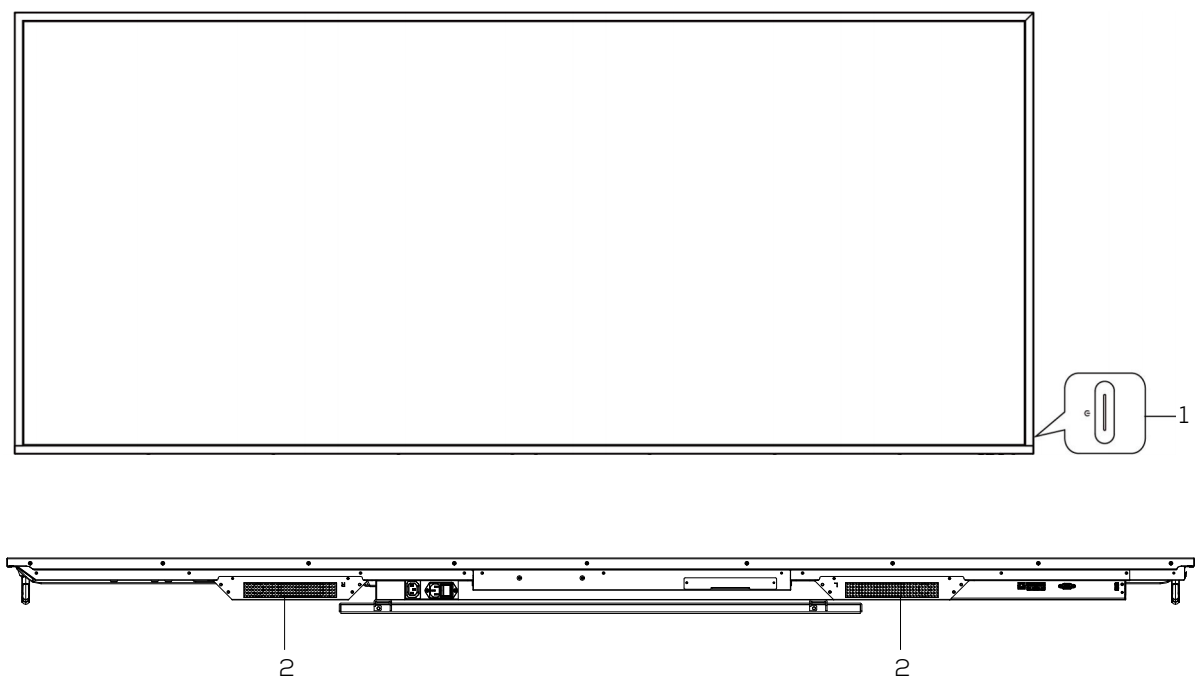

NO.	Items	Function description
1		Power Button: Tap to enter energy saving function press at least 2 seconds to enter standby mode.
2	Loudspeaker	Sound output

2. Terminal interface

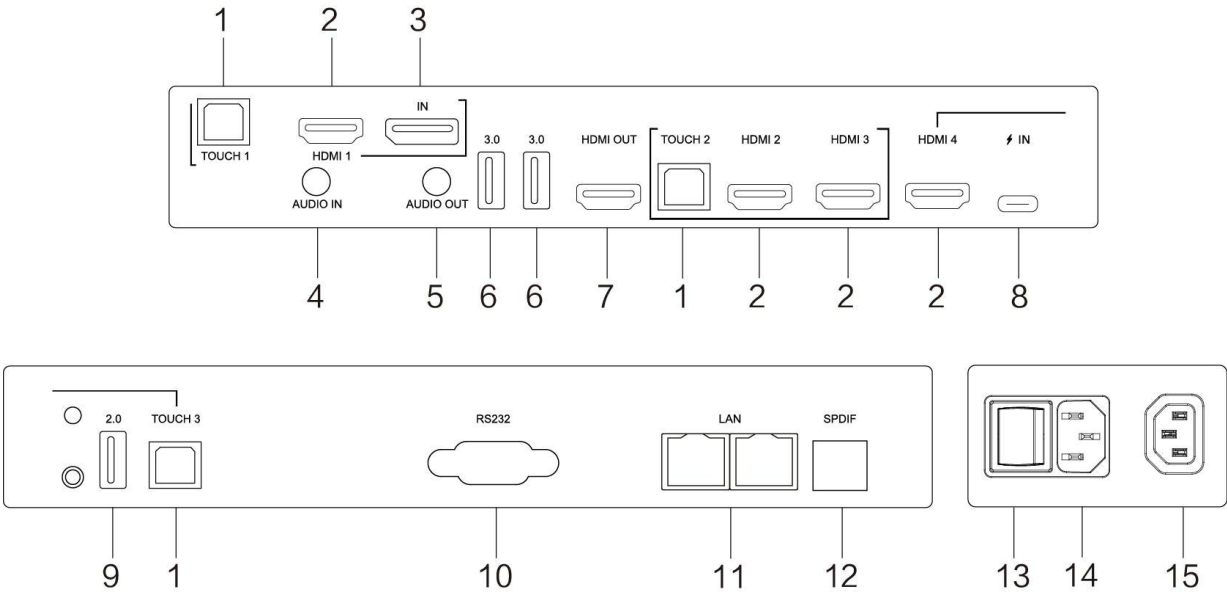


NO.	Items	Function description
1	TOUCH 1/2/3	Touch signal output to the external computer
2	HDMI 1/2/3/4	High-definition multimedia interface signal input, connect to devices with HDMI output interface (personal computer with HDMI output, set-top box, or another video device)
3	IN	DP IN: Connected to devices with Display Port output function.
4	AUDIO IN	External audio sources input (It is generally used as the sound input of the VGA interface)
5	AUDIO OUT	Audio output to the external speaker
6	3.0	Connect USB devices such as mobile hard disk, U disk, USB keyboard, mouse, USB drives, etc.
7	HDMI OUT	Connected to the devices with HDMI input function (monitor)
8	⚡ IN	Support charging, data transmission, extension for audio and video output interface, etc. Note: The maximum rated power of the USB Type-C port of this product is 100W; When using this port to charge electronic devices, the charging power of the electronic device cannot exceed the rated power of this port. If the charging power of the electronic device exceeds the rated charging power of this port, please Do not directly use this port for charging.
9	2.0	Connect USB devices such as mobile hard disk, U disk, USB keyboard, mouse, USB drives, etc.

NO.	Items	Function description
10	RS232	Serial interface, used for mutual transfer of data between devices
11	LAN	Connected to Ethernet
12	SPDIF	Carry multichannel sound via optical signals.
13	AC SWITCH	To open or shut down AC power supply. "I" means power on, "O" means power off
14	AC IN	AC power input, connecting AC power supply
15	AC OUT	AC power output,connecting AC power supply

3. Remote control

(1) Remote Control Button Instruction

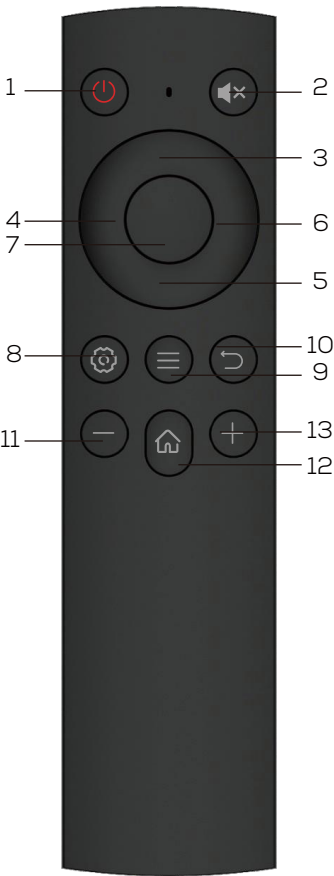

(2) Detailed Function Description

Number	Function description
1	Power on / off
2	Mute on / off
3	Up
4	Left
5	Down
6	Right
7	OK
8	Settings
9	Source menu
10	Back
11	Decrease volume
12	Homepage
13	Increase volume


3) Remote Control Instruction

Install Batteries

- (1) Open back cover of battery component on the back of remote control.
- (2) Install AAA type battery according to the corresponding electrode, make sure battery positive and negative pole are correct ("+" to "+", "-" to "-"), please do not mix using old and new batteries.
- (3) After battery is installed, close the back cover of battery components, and make the following clip buckled to the bottom.

Range of remote control

Remote control can work normally within the range of 8 meters distance, 30 degrees left and right from the remote-control receiver; in order to protect environment, please dispose waste battery into recycling box.

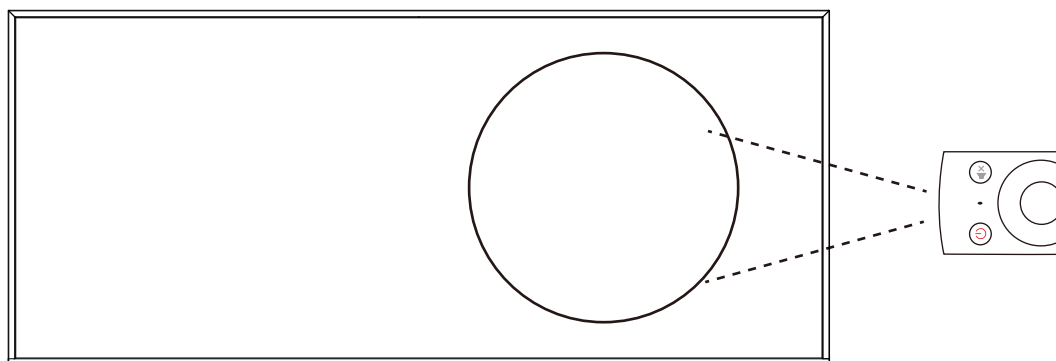


⚠ If the battery is replaced by an incorrect type, it may lead to explosion.

IX. Wired Screen Share From Your Laptop to the Display


Function:

1. Wired Screen Share from your laptop to the display

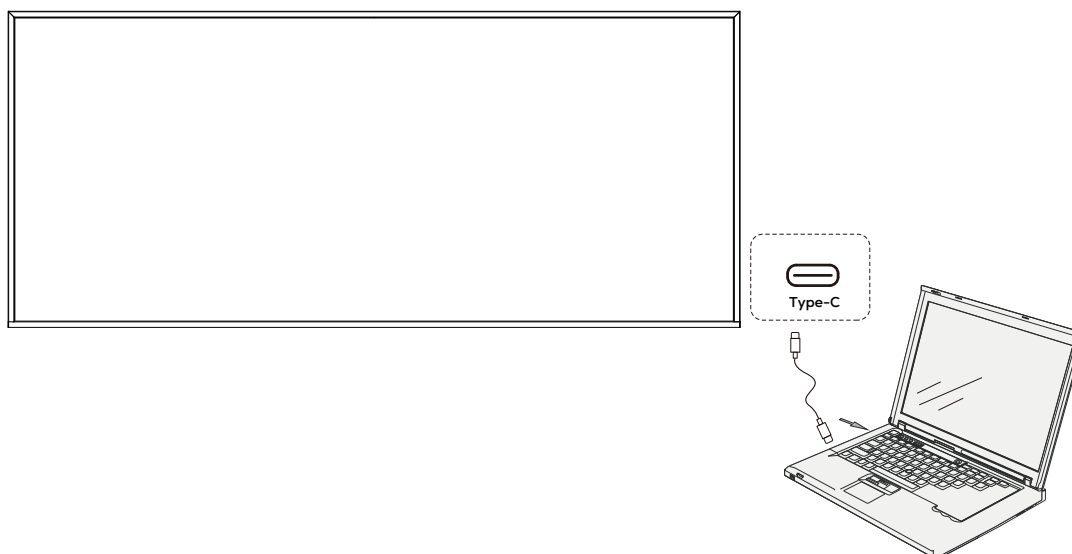


X. Frequently Connected Ports

Ensure to organize the cables when connecting ports to prevent accidental pulling or long-term stress that may cause damage or opening of the port's metal shell.

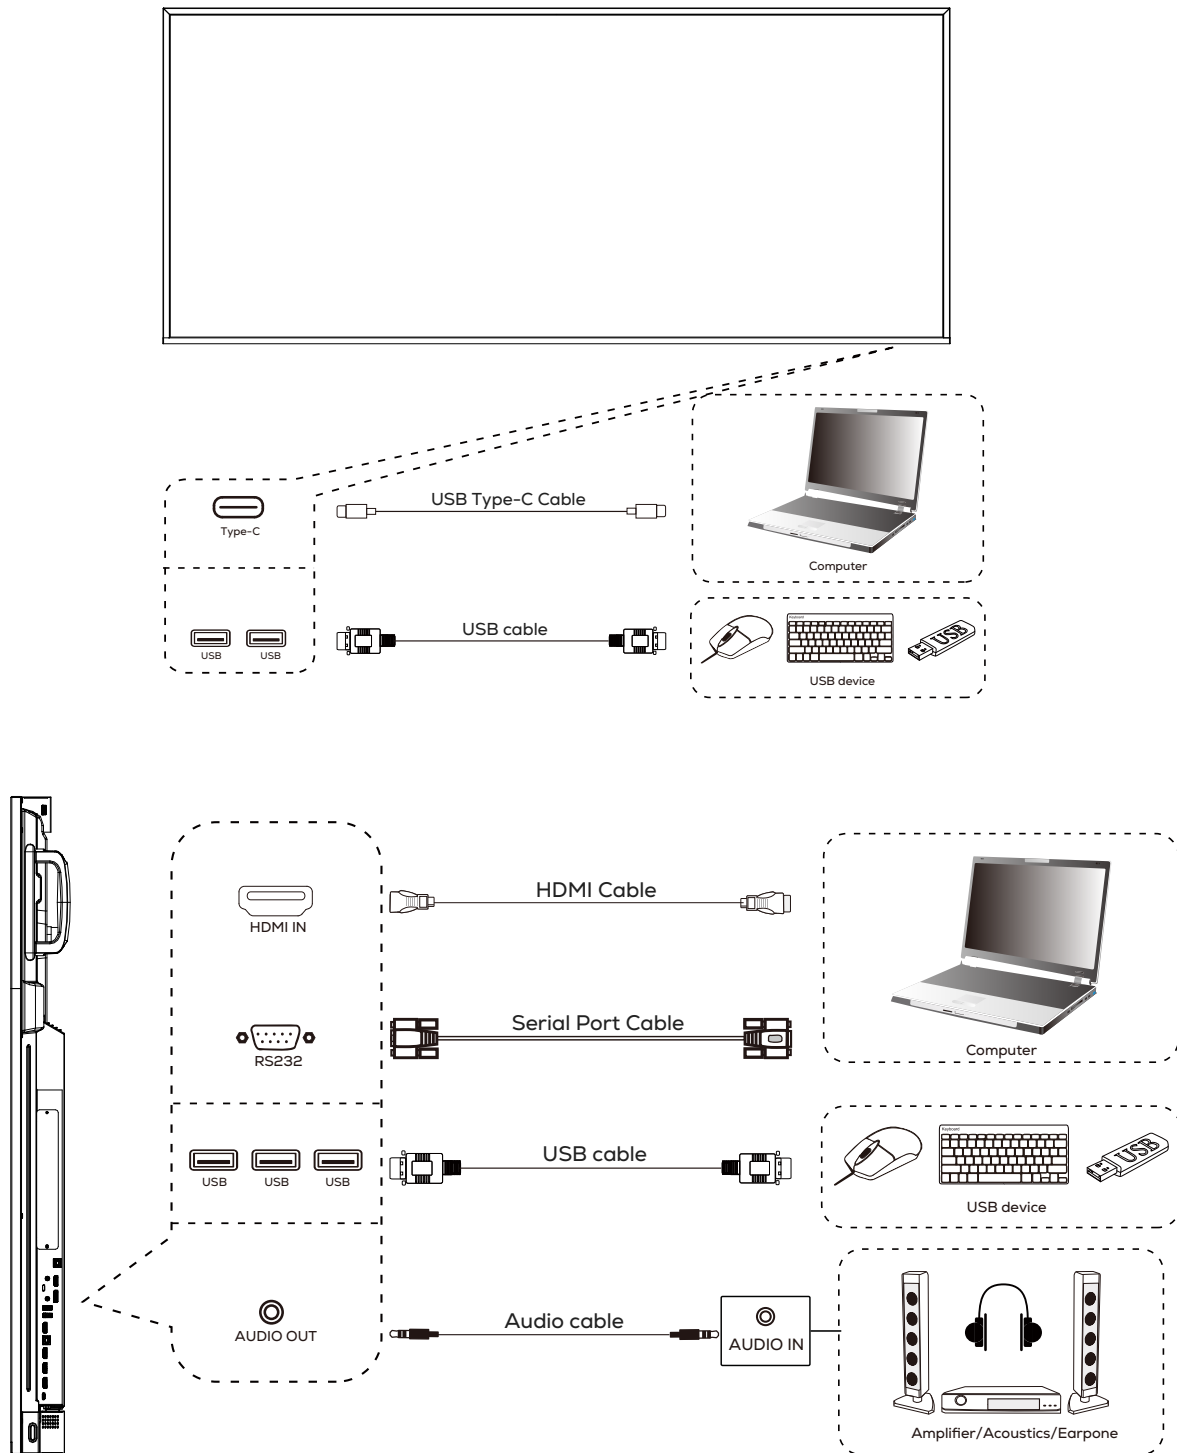

XI. First Start of MAXHUB Commercial Display

To start the display, press the power key. Once the device is on, it is ready for use with all of its features. During the initial setup, the unit may take some time to complete initialization. Please wait for the process to finish before shutting down the unit.

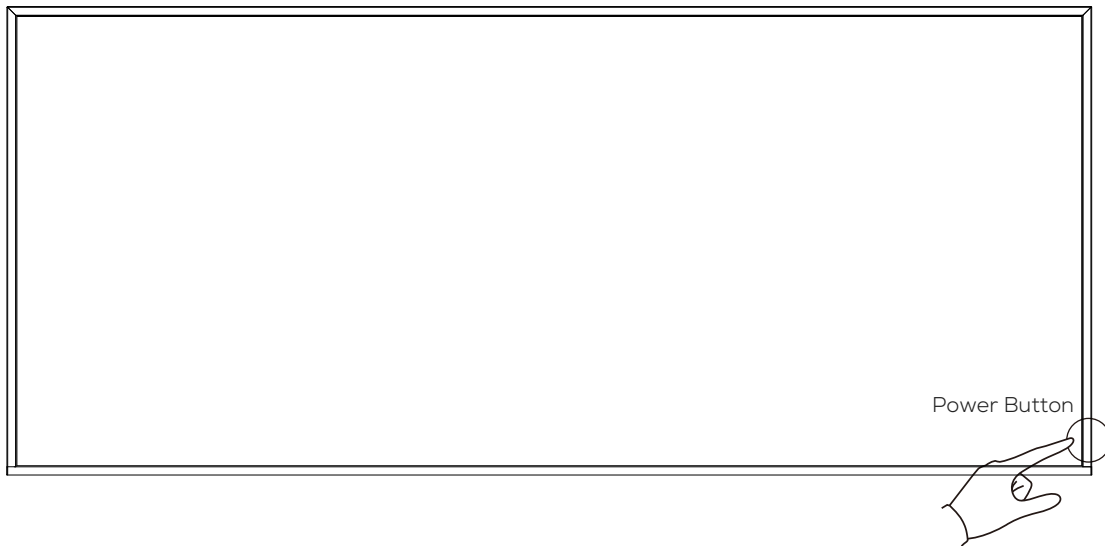

XII. Maintenance

Proper maintenance can prevent many failures in early stage. Regular careful cleaning can keep the brand new appearance of the unit. Please unplug the power line before cleaning and maintenance in case of electric shock.

Clean screen

1. Please evenly mix some fabric softener or detergent with alcohol.
2. Please saturate a piece of soft cloth in the mixture above mentioned.
3. Take out the cloth and wring it to half dry and then clean the screen.
4. Repeat the procedures above. Attention: do not drop water into the unit while cleaning.

Clean front frame

Please choose dry, soft and non-fluff cloth to clean the face frame.

Non-use of the unit for a long term

If the machine is not used for a long term, please pull out the plug lest lightning or other power supply ripples damage the unit.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Hereby, Guangzhou Shirui Electronics Co., Ltd. declares that the this product is compliant with the essential requirements. The complete Declaration of Conformity may be requested through the following postal address:

MAXHUB EUROPE B.V.

BEURSPLEIN 37, 3011AA ROTTERDAM, NETHERLANDS



This symbol, affixed to the product or its packaging, indicates that the product must not be processed with household waste. It must be brought to an electric and electronic waste collection point for recycling and disposal. By the appropriate disposal of this product you also help in preventing potentially negative consequences for the environment and human health. The recycling of materials helps preserve our natural resources. For further information regarding the recycling of this product, please contact your municipality, local waste disposal centre or the store where the product was purchased.

