



Description

K-array presents its new full-range speaker line, Domino. These stainless steel compact speakers with plug and play capabilities do not require pre-sets and can be driven by any amplifier making them the perfect solution for applications from intimate restaurants to live concert settings. The new line consists of three speakers: the KF26, the KF210 and the KF212.

The KF26 is the smallest of the trio measuring less than 12 cm deep. It is comprised of a 6" and a 2" neodymium magnet woofers coaxially mounted plus one 6" passive radiator to extend the bass response. The KF26 has a selectable impedance (8/32 ohm) and 90° coverage, horizontally and vertically. Designed as a passive speaker, the KF26 can be transformed into a self-powered speaker just by inserting the specific amplifier accessory,

KA1-FF. With a max SPL of 115 dB peak, the KF26 is ideal for smaller installations that require high quality in a practical, compact form. The Domino line is accompanied by several product-specific accessories that can enhance the system's setup. Wall brackets are included while other useful tools are available for purchase, like the flush mount recessing frame, K-WF26, used to further hide the speakers. Domino is available in a 24 K gold plated finish as well as brushed or polished stainless steel finishes in addition to the standard sleek black and elegant white rendering them suitable for any venue. All KF26 components are designed by the K-array R&D department and custom-made under the K-array quality control system.

Colors		Premium Finishes		Features		Frequent Applications	
Black		Gold		Full Range	Compatible with Any Amplifier	Retail	Broadcast & Studios
White		Polished		Visually Discreet	Weather Resistent	Museum	Hotels
RAL		Brushed		Selectable Impedence	Self-Powered Capabilities	Cafes, Bistros & Restaurant	Theme Parks

Accessories						
KA1-FF	K-2SPK	K-PMOUNT	K-KUIP	K-WF26	K-WALL2L	K-WALL2
K-FOOT2	K-JOINT2	K-FLY2	K-KCLAMP	K-KCLAMP/S		

Technical Specifications



General	
Type	Point source
Transducers	6" neodymium magnet woofer 2" neodymium magnet woofer 6" passive radiator
Frequency Response ¹	50 Hz – 19 kHz (-6 dB)
Max SPL ²	115 dB (peak)
Rated Power	160 W
Coverage	V. 90° H. 90°
Connectors	4PIN euroblock connector (included)
Nominal Impedance	8 Ω / 32 Ω selectable

Handling & Finishes	
Dimensions (WxHxD)	180 x 350 x 118 mm (7.1 x 13.8 x 4.6 in) ³
Weight	6.5 kg (14.3 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	Gold, Polished, Brushed

Regulations	
IP Rating	IP64 ⁴


Accessories	
Recommended Amplifier	Kommander-KA14, Kommander-KA24, Kommander-KA84
Accessories	KA1-FF, K-2SPK, K-PMOUNT, K-KUIP, K-WF26, K-WALL2L, K-WALL2, K-FOOT2,K-JOINT2, K-FLY2, K-KCLAMP, K-KCLAMP/S

¹ With dedicated preset
² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m
³ Removable rubber feet not included in measures
⁴ More complete water protection with K-KUIP accessory

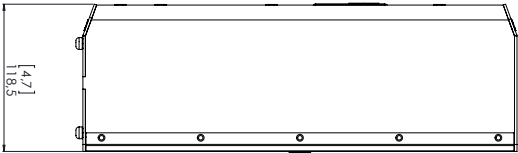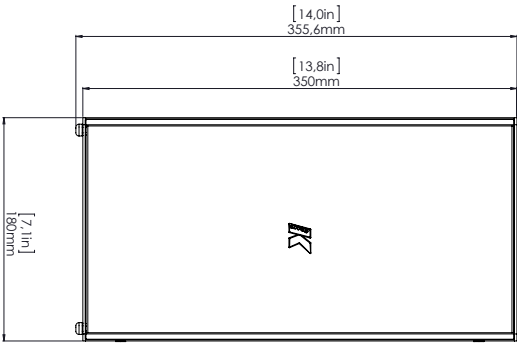

Notes for data:
New materials and designs are introduced into existing products without previous notice.
Present systems may differ in some respects from those presented in this catalog.



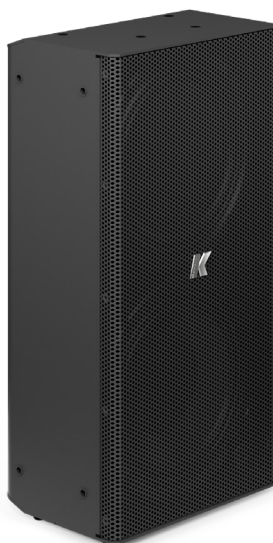

Description

Dedicated to all applications that require full-range compact speakers with wide dispersion pattern, the K-array Domino-KFC26 is comprised of a 6" neodymium magnet woofer and a 6" passive radiator to extend the bass response down to 50 Hz. A 1.1" tweeter is mounted coaxially to the 6" woofer to guarantee a pristine reproduction of the higher frequencies up to 20 kHz.

The Domino-KFC26 shares the same size and SPL capability of the Domino-KF26, but the dome tweeter guarantees a wider dispersion pattern of 140°, making the Domino-KFC26 ideal for cinema and home cinema applications.

These stainless steel compact speakers with plug and play capabilities do not require dedicated presets and can be driven by any amplifier making

them extremely easy to integrate into new or existing projects.

The Domino line is accompanied by several product-specific accessories that can enhance the system's setup. Wall brackets are included while other useful tools are available for purchase, like the flush mount recessing frame, K-WF26, used to further hide the speakers. Domino is available in a 24 K gold plated finish as well as brushed or polished stainless steel finishes in addition to the standard sleek black and elegant white rendering them suitable for any venue.

All KFC26 components are designed by the K-array R&D department and custom-made under the K-array quality control system.

Colors		Premium Finishes		Features		Frequent Applications	
Black		Gold		Full Range	Compatible with Any Amplifier	Cinema	Broadcast & Studios
White		Polished		Visually Discreet	Weather Resistant	Home Cinema	Hotels
RAL		Brushed		Wide coverage		Cafes, Bistros & Restaurant	Museums

Accessories						
K-WF26	K-2SPK	K-PMOUNT	K-KUIP	K-WALL2	K-WALL2L	K-WALL2
K-FOOT3	K-JOINT3	K-FLY3	K-KCLAMP	K-KCLAMP/S		

Technical Specifications



General	
Type	Point source
Transducers	6" neodymium magnet woofer 1.1" dome tweeter 6" passive radiator
Frequency Response ¹	50 Hz – 20 kHz (-6 dB)
Max SPL ²	115 dB (peak)
Rated Power	160 W
Coverage	V. 140° H. 140°
Connectors	2PIN euroblock connector (included)
Nominal Impedance	8 Ω

Handling & Finishes	
Dimensions (WxHxD)	180 x 350 x 118 mm (7.1 x 13.8 x 4.6 in) ³
Weight	6.5 kg (14.3 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	Gold, Polished, Brushed

Regulations	
IP Rating	IP64 ⁴

Accessories	
Accessories	K-2SPK, K-PMOUNT, K-KUIP, K-WF26, K-WALL2L, K-WALL2, K-FOOT3, K-JOINT3, K-FLY3, K-KCLAMP, K-KCLAMP/S

¹ With dedicated preset
² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m
³ Removable rubber feet not included in measures
⁴ More complete water protection with K-KUIP accessory

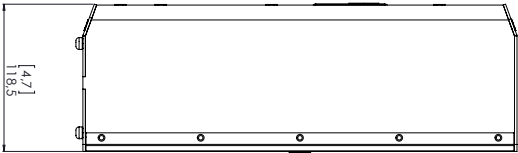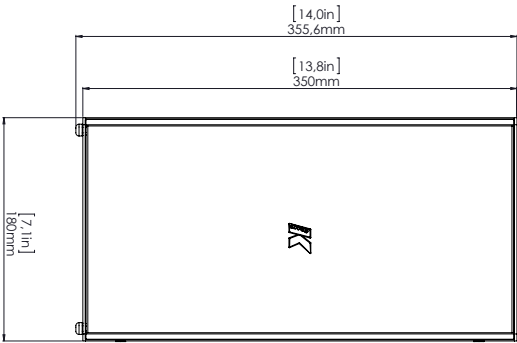

Notes for data:
New materials and designs are introduced into existing products without previous notice.
Present systems may differ in some respects from those presented in this catalog.

