



ENG • ESP



Description

The Truffle-KTR24 is the smallest model in the compact line of Truffle subwoofer.

The source subwoofer has a frequency range of 45 Hz to 150 Hz and is comprised of a single 4" driver with passive radiators. Easy to conceal, the Truffle-KTR24 has an 8"-long cylindrical speaker box equipped with one

4" active driver on one end and one 4" passive speaker on the other, making the box a perfect omnidirectional low-end source.


This subwoofer provides the low-end frequencies for the Azimut-KAMUT2L1 audio system.

Technical Specifications

General	
Type	Passive subwoofer
Drivers	4" ferrite magnet woofer with 1" voice coil + 4" passive radiator
Frequency Response	45 Hz – 150Hz (-6dB)
Max SPL	112 dB ¹
Power handling	60 W
Nominal Impedance	4 Ω
Crossover	External crossover required
Coverage	Omni

Handling & Finishes	
IP Rating	IP64
Dimensions	122 x 117 x 199 mm (4.8 x 4.6 x 7.8 in)
Weight	1.5 kg (3.31 lb)
Colors & Finishes	Black textured powder paint
Recommended Amplifier	Kommander-KA02

¹ Maximum SPL is calculated using crest factor 4 (12dB) measured at 1 m.

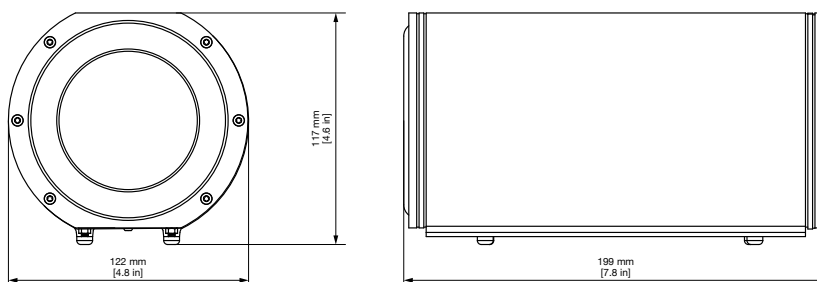

Notes for data:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.

New materials and designs are introduced into existing products without previous notice.

KTR24_Datasheet_1.5



Descripción

El Truffle-KTR24 es el modelo más pequeño de la línea compacta de subwoofers Truffle.

El subwoofer fuente tiene una gama de frecuencias de 45 Hz a 150 Hz y está compuesto por un único transductor de 4" con radiadores pasivos. Fácil de ocultar, el Truffle-KTR24 tiene una caja acústica cilíndrica de 8" de longitud equipada con un

Transductor activo de 4" en un extremo y un altavoz pasivo de 4" en el otro, lo que convierte a la caja en una perfecta fuente omnidireccional de graves.


Este subwoofer proporciona las frecuencias bajas al sistema de audio Azimut-KAMUT2L1.

Technical Specifications

General	
Type	Passive subwoofer
Drivers	4" ferrite magnet woofer with 1" voice coil + 4" passive radiator
Frequency Response	45 Hz – 150Hz (-6dB)
Max SPL	112 dB ¹
Power handling	60 W
Nominal Impedance	4 Ω
Crossover	External crossover required
Coverage	Omni

Handling & Finishes	
IP Rating	IP54
Dimensions	122 x 117 x 199 mm (4.8 x 4.6 x 7.8 in)
Weight	1.5 kg (3.31 lb)
Colors & Finishes	Black textured powder paint
Recommended Amplifier	Kommander-KA02

¹ Maximum SPL is calculated using crest factor 4 (12dB) measured at 1 m.

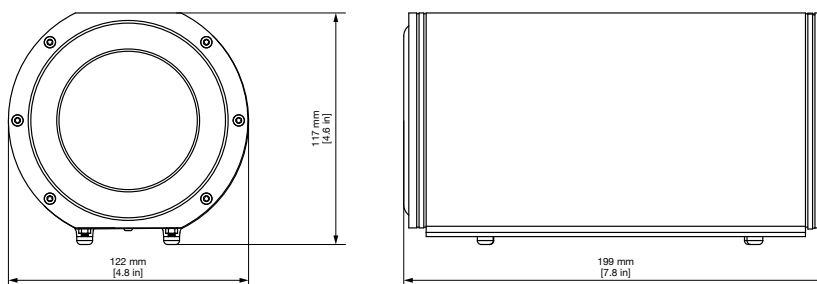

Notes for data:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.

New materials and designs are introduced into existing products without previous notice.

KTR24_Datasheet_1.5