



ENG • ESP



Description

The Truffle-KTR25 is the medium model in the compact line of Truffle subwoofers for deeper bass experience.

The source subwoofer has a frequency range of 45 Hz to 150 Hz and is comprised of a single 5.25" driver with passive radiators. Designed to remain unseen, the Truffle-KTR25 has an 10"-long cylindrical speaker box equipped

with one 5.25" active driver and one symmetrical 5.25" passive speaker on the opposite side – perfect for an omnidirectional low-end source.


This subwoofer provides the low-end frequencies for the Azimut-KAMUT2L14 audio system.

Technical Specifications

General	
Type	Passive subwoofer
Drivers	5.25" ferrite magnet woofer with 1" voice coil + 5.25" passive radiator
Frequency Response	45 Hz – 150Hz (-6dB)
Max SPL	115 dB ¹
Power handling	80 W
Nominal Impedance	4 Ω
Crossover	External crossover required
Coverage	Omni

Handling & Finishes	
IP Rating	IP64
Dimensions	152 x 147 x 258 mm (6.0 x 5.8 x 10.2 in)
Weight	2,5 kg (5.51 lb)
Colors & Finishes	Black textured powder paint
Recommended Amplifier	Kommander-KA02

¹ Maximum SPL is calculated using crest factor 4 (12dB) measured at 1 m.

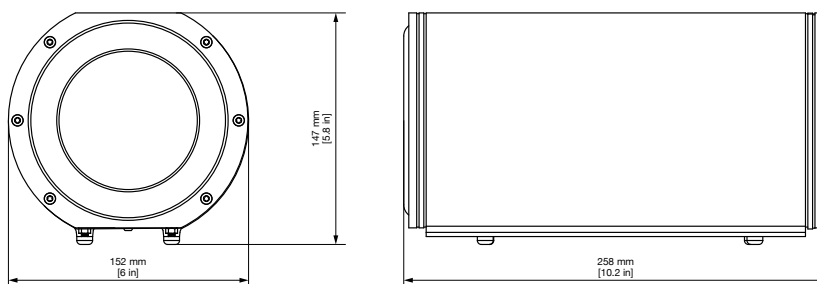

Notes for data:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.

New materials and designs are introduced into existing products without previous notice.

KTR25_Datasheet_1.5



Descripción

El Truffle-KTR25 es el modelo medio de la línea compacta de subwoofers Truffle para una experiencia de graves más profunda. El subwoofer fuente tiene una gama de frecuencias de 45 Hz a 150 Hz y está compuesto por un único transductor de 5,25" con radiadores pasivos. Diseñado para pasar desapercibido, el Truffle-KTR25 tiene una caja acústica cilíndrica de 10" de longitud equipada con


con un transductor activo de 5,25" y un altavoz pasivo simétrico de 5,25" en el lado opuesto, perfecto para una fuente de graves omnidireccional. Este subwoofer proporciona las frecuencias bajas al sistema de audio Azimut-KAMUT2L14.

Technical Specifications

General	
Type	Passive subwoofer
Drivers	5.25" ferrite magnet woofer with 1" voice coil + 5.25" passive radiator
Frequency Response	45 Hz – 150Hz (-6dB)
Max SPL	115 dB ¹
Power handling	80 W
Nominal Impedance	4 Ω
Crossover	External crossover required
Coverage	Omni

Handling & Finishes	
IP Rating	IP54
Dimensions	152 x 147 x 258 mm (6.0 x 5.8 x 10.2 in)
Weight	2,5 kg (5.51 lb)
Colors & Finishes	Black textured powder paint
Recommended Amplifier	Kommander-KA02

¹ Maximum SPL is calculated using crest factor 4 (12dB) measured at 1 m.

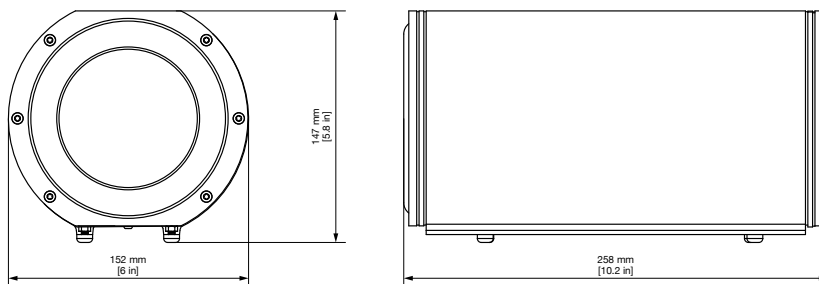

Notas:

Los altavoces pasivos requieren preajustes específicos cargados en amplificadores K-array integrados. Se introducen nuevos materiales y diseños en los productos existentes sin previo aviso.