


Humly Room Display

Designed to blend in. Built to keep meetings flowing.

Instant room clarity, right outside the door.

A premium room display that keeps meeting spaces running smoothly. See availability at a glance, book in seconds, and keep schedules accurate with check-in and sensor support, all managed centrally through the Humly Control Panel.

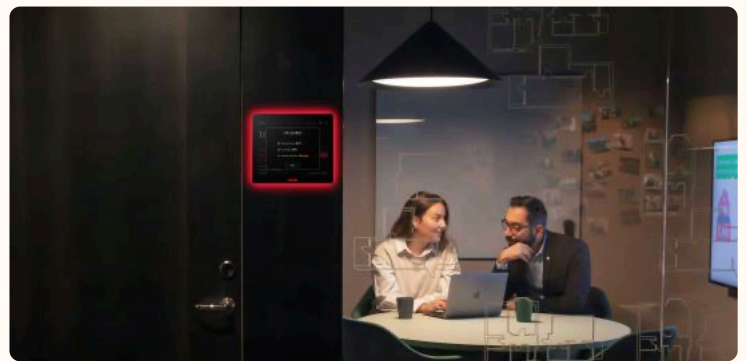

Core features

Find, book, and manage rooms

- See room status and meeting details instantly
- Book, extend, or end meetings directly on the display
- Find another available room nearby with one tap

Streamlined user experience

- Clean interface designed for quick decisions
- Report issues with the room directly from the screen
- Optional check-in reminders help keep bookings accurate

Touchless check-in

- Quick check-in via RFID or NFC
- A faster flow for high-traffic workplaces


Sensor integration

- Display environmental data such as CO₂, temperature, and humidity (with Humly Sense + compatible sensors)
- Motion/presence support for smarter room status and automation (when configured)

Remote management and monitoring

- Manage Room Displays across multiple locations
- Real-time updates, monitoring, and configuration via Humly Control Panel
- Usage data available when you need it
- Usage statistics and workplace analytics, ready when decisions matter

Works with the platforms you already use

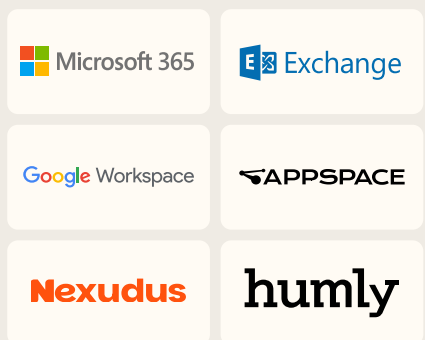

Why choose Humly Room Display?

Elegant, timeless design

- Recognized for its timeless, floating design with a full RGB LED halo
- Designed to blend into modern interiors, clear when it needs to be
- Durable hardware built for long-term daily use (5+ year lifespan)

Customizable and versatile

- Add your logo and tailor on-screen content to your workplace
- Flexible installation for standard walls or glass
- Five-way cable exit for clean, adaptable setups
- Supports advanced configurations like Room within a Room

Global user accessibility

- Multilingual support for global teams
- Works with leading calendar platforms
- Flexible configuration for different office types

User-friendly experience

- Easy-to-use touchscreen for ad hoc and scheduled bookings
- Clear status visibility at a glance with the LED halo

Maximum security options

- Max Security hardware available for stricter installations, including versions with Wi-Fi and Bluetooth disabled

Open API for custom solutions


- Connect to third-party systems and build custom workflows when needed

Supported accessories

- Mounting kits for standard walls and glass
- Cable management options (including five-way exit)
- Power adapter, Ethernet, and PoE options
- Support for third-party sensors (via Humly Sense when configured)

The room system you don't have to think about.

Clear status. Fast booking. Fewer interruptions. Humly Room Display keeps meeting spaces running smoothly, while giving teams central control and monitoring through the Humly Control Panel.

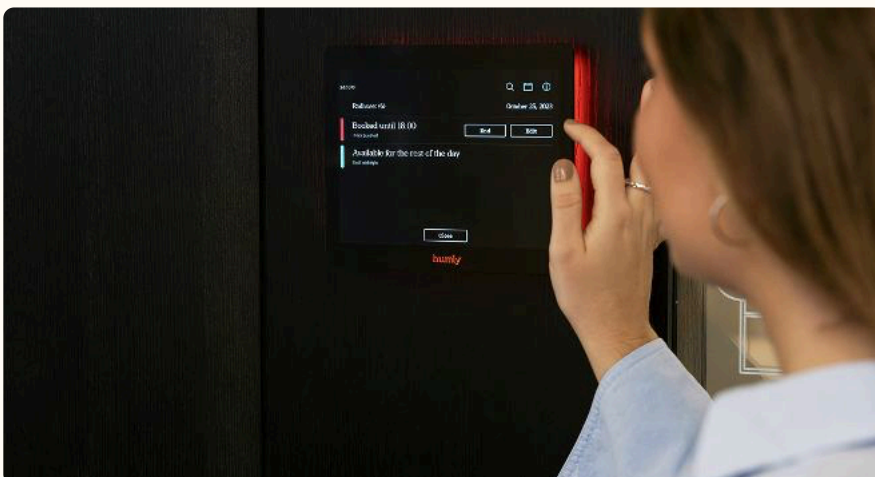

reddot winner 2021



GOOD DESIGN AWARD
2021年度受賞

Technical Specifications

Display

Display Size, inch (cm)

8 inches (20.32 cm)

Display Resolution

1024 × 768 pixels, 160 PPI (pixels per inch)

Pixel Density

235 PPI (pixels per inch)

Display Technology

LCD IPS display with 180° viewing angle and capacitive touch technology

Display Finish

Matte, Anti-Glare display with anti-fingerprint treatment

LED

Number of LED lights

48

Ambient & Logo Lighting

RGB LED backlight and illuminated logo

Customizable LED colors

Ambient and logo

Sensors

Sensor

Detects pertinent atmospheric data including air quality, temperature, carbon dioxide levels, and humidity with third-party sensors. Can also be integrated with motion sensors.

Network & Connectivity

Ethernet LAN

RJ-45 10/100/1000 Mbps

Power over Ethernet (PoE)

PoE (IEEE 802.3af) and PoE+ (IEEE 802.3at)

Wi-Fi


802.11 a/b/g/n 2,4GHz & 5GHz

Network Configuration

DHCP, Static IP

RFID & NFC

NFC/RFID 13.56 Mhz (ISO/IEC 14443A/B), MIFARE 4K/1K (does not support ISO/IEC 15693 or MIFARE Ultralight C)

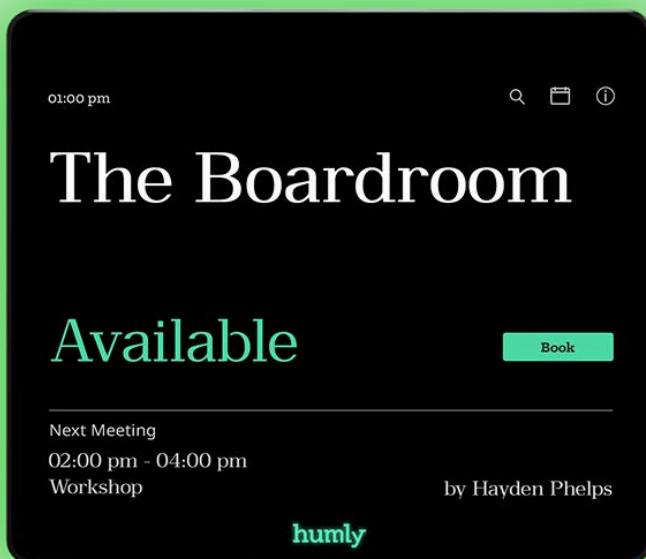

Input/Output

USB

USB-A, for device management (flashing, upgrading, log access)

Ethernet

RJ-45, 10/100/1000 Mbps (Gigabit Ethernet)

DC Power Input

Barrel Jack connector

Reboot

Reboot button located on the backside, top right corner

System Software

Operating System

Embedded Linux

Power Supply

Power Adapter (Barrel Jack)

12V 2A AC/DC (HUM1006 12V Power Supply, sold separately & not included)

Power over Ethernet (PoE)

PoE (IEEE 802.3af) and PoE+ (IEEE 802.3at), 10-12W

Mounting Options

Wall Mounting

VESA 75 × 75 mm wall mount included (replacement wall mount model HUM1008 available separately)

Glass Wall Mounting

Glass Mount Film (HUM1007 Glass Mount Film, sold separately & not included)

Cable Management

5-way cable exit options for flexible installation

Accessories & Customized Hardware

Supported Humly Accessories

Wall Mount (HUM1008), Glass Mount Film (HUM1007), 12V Power Supply (HUM1006)

Humly Maximum Security

Customized hardware optimized for high-security installations and environments

Dimensions & Weight

Dimensions (H × W × D), with wall mount

183 × 157 × 28.7 mm (7.20 × 6.18 × 1.13 inches)

Weight (incl. wall mount)

650 grams (22.9 ounces)

