




ENG • ESP



Description

The Thunder-KS5PI is a passive subwoofer featuring 2x long excursion 21" neodymium magnet woofer, requiring two amplifier channels to be driven.

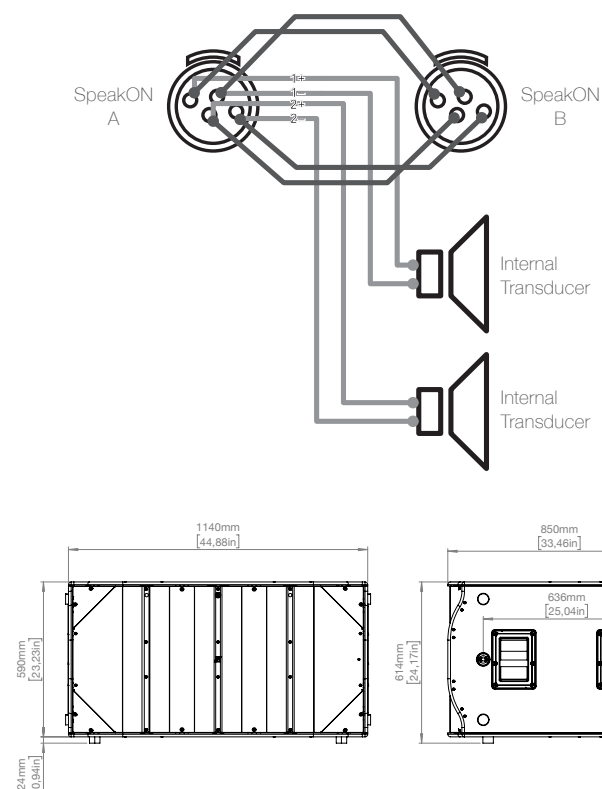

Technical Specifications

Type	Passive subwoofer
Transducers	2x21" neodymium magnet woofer
Frequency Response ¹	30 Hz – 150/300 Hz (-6 dB) crossover dependant
Crossover	External DSP-controlled, Low Pass @ 150 Hz up to 300 Hz, preset dependant
Max SPL ²	145 dB peak
Nominal Impedance	2x 4Ω
Power handling	2x 2800 W peak
Coverage	Omni
Connectors	Speaker input/parallel output 2x SpeakON NL4 Input terminals: IN 1+/1- (woofer 1), Link 2+/2- (woofer 2)

Handling & Finishes

IP Rating	IP54
Dimensions (WxHxD)	1140 x 590 x 850 mm (44.9 x 23.2 x 33.5 in)
Weight	97,4 kg (214.7 lb)

¹ Extensible with dedicated preset according to the midrange crossover point.

² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m.


Notes:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.
New materials and designs are introduced into existing products without previous notice.
Present systems may differ in some respects from those presented in this document.



Descripción

El Thunder-KS5P I es un subwoofer pasivo con 2 woofer de imán de neodimio de 21" de larga excursión que requiere dos canales de amplificación para funcionar.

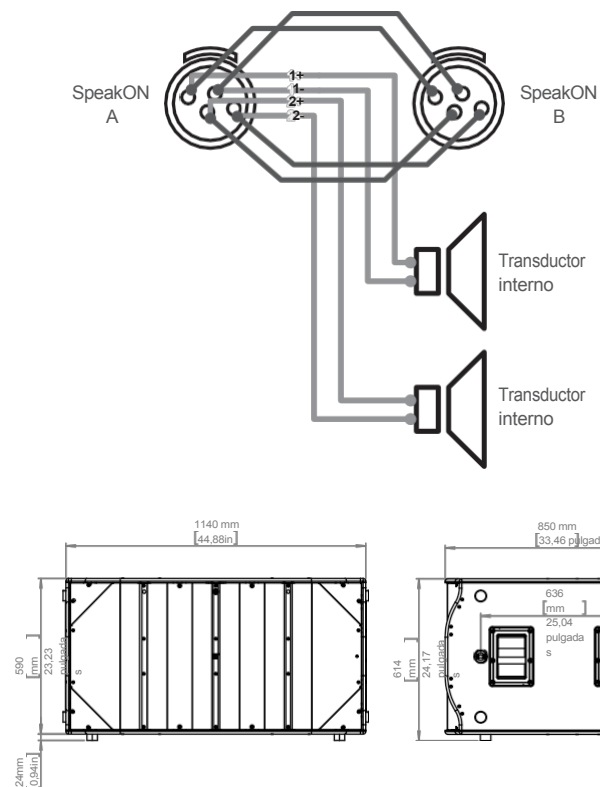

Especificaciones técnicas

Tipo	Subwoofer pasivo
Transductores	Woofer de imán de neodimio de 2x21
Respuesta en frecuencia ¹	30 Hz - 150/300 Hz (-6 dB) en función del crossover
Cruce	Controlado por DSP externo, Paso bajo @ 150 Hz hasta 300 Hz, según preajuste
SPL máximo ²	145 dB pico
Impedancia nominal	2x 4Ω
Potencia	2x 2800 W pico
Cobertura	Omni
Conectores	Entrada de altavoz/salida en paralelo 2x SpeakON NL4 Terminales de entrada: IN 1+/1- (woofer 1), Link 2+/2- (woofer 2)

Handling & Finishes

Clasificación IP	IP54
Dimensiones (AnxAlxPr)	1140 x 590 x 850 mm (44,9 x 23,2 x 33,5 pulg.)

¹Extensible with dedicated preset according to the midrange crossover point.

² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m

Notas:

Los altavoces pasivos requieren preajustes específicos cargados en amplificadores K-array integrados. Se introducen nuevos materiales y diseños en los productos existentes sin previo aviso. Los sistemas actuales pueden diferir en algunos aspectos de los presentados en este documento.