

COM 20 / COM 40

WEATHERPROOF ALUMINIUM BODY COLUMN LOUDSPEAKERS

Loudspeakers with a wide frequency response and high sensitivity are well-suited for speech and background music reproduction in large areas requiring a straightforward and dependable solution. Designed for durability, they perform reliably even under severe weather conditions. The COM 20 model integrates two 5" (127 mm) full-range speakers, while the COM 40 incorporates four 5" (127 mm) full-range speakers.




Technical Specifications	COM 20	COM 40
Rated power	20 W	40 W
Transformer power taps	20 W - 10 W	40 W - 20 W
Sensitivity	92 dB (1 W/1 m)	94 dB (1 W/1 m)
Maximum SPL	105 dB (Pmax/1 m) at 1179 Hz	110 dB (Pmax/1 m) at 1113 Hz
Frequency response	100 Hz - 15 kHz	100 Hz - 15 kHz
Driver dimensions	2 x 5" (127 mm)	4 x 5" (127 mm)
Dispersion at 1000 Hz	180° (H), 150° (V)	180° (H), 150° (V)
Dimensions	378 mm x 151 mm x 125 mm	618 mm x 151 mm x 125 mm
Protection	IP 54	IP 54
Weight	2.9 kg	4.7 kg
Material	Aluminum	Aluminum
Colour	Grey (RAL 7038)	Grey (RAL 7038)


COM 20 / COM 40

WEATHERPROOF ALUMINIUM BODY COLUMN LOUDSPEAKERS


Frequency response

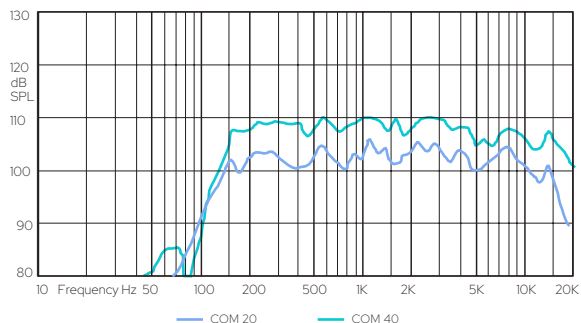

Horizontal/vertical polar diagrams

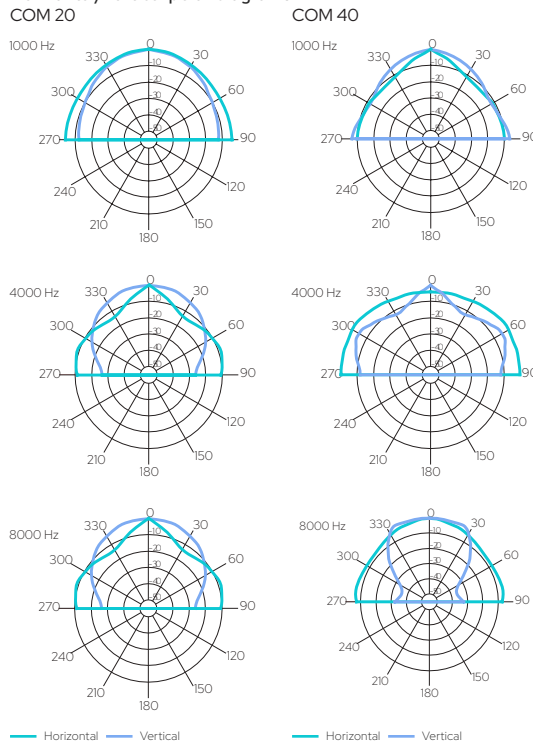

Impedance

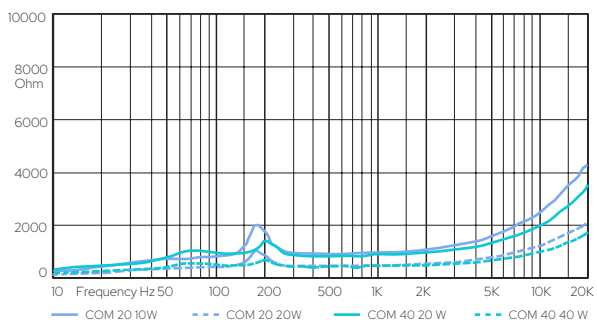

Dimensions

