

COM SLIM 30

SLIM BODY ALUMINIUM COLUMN LOUDSPEAKERS

Slim-profile loudspeaker designed for use in areas with high reverberation time, such as churches, train stations, and market halls. The speaker features a discreet, neutral design suitable for acoustically and visually sensitive interiors. The COM SLIM 30 is equipped with four 2" (50 mm) woofers and one 1" (25 mm) tweeter. A mounting bracket is included.




Optional MB1
mounting bracket

Technical Specifications	COM SLIM 30
Rated power	30 W
Transformer power taps	30 W - 15 W - 7.5W - 8 Ω
Sensitivity	91 dB (1 W/1 m)
Maximum SPL	108 dB (Pmax/1 m) at 1995 Hz
Frequency response	180 Hz – 18 kHz
Driver dimensions	4 x 2" (50 mm) woofer, 1 x 1" (25 mm) tweeter
Dispersion at 1000 Hz	140° (H), 80° (V)
Dimensions	405 mm x 75 mm x 69 mm
Protection	IP 55
Weight	1.7 kg
Material	Aluminum
Colour	White (RAL 9016)
Additional accessory	MB1 wall mount bracket


COM SLIM 30

SLIM BODY ALUMINIUM COLUMN LOUDSPEAKERS




Frequency response

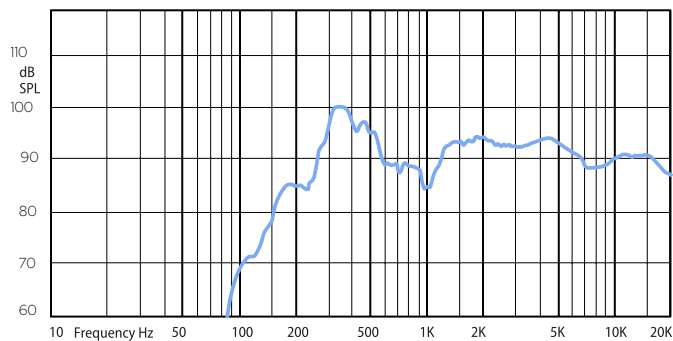

Impedance

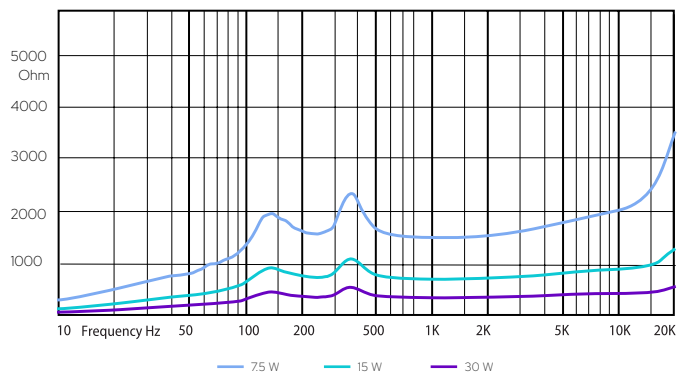

Horizontal/vertical polar diagrams

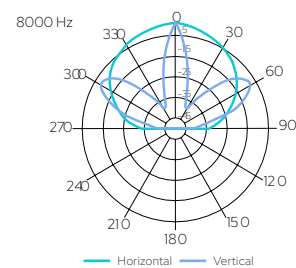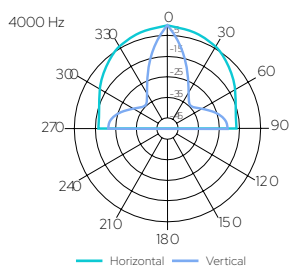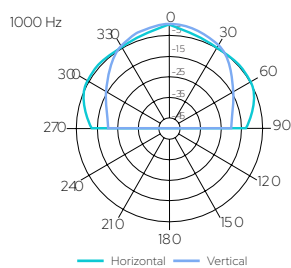

Dimensions



75 mm



69 mm



405 mm