

COM SLIM 50

SLIM BODY ALUMINIUM COLUMN LOUDSPEAKERS

Slim-profile loudspeaker designed for use in areas with high reverberation time, such as churches, train stations, and market halls. Its neutral and discreet appearance makes it ideal for visually sensitive interiors. The COM SLIM 50 is equipped with ten 2" (50 mm) woofers and one 1" (25 mm) tweeter. A mounting bracket is included.




Optional MB1
mounting bracket

Technical Specifications	COM SLIM 50
Rated power	50 W
Transformer power taps	50 W - 25 W - 12.5W - 20 Ω
Sensitivity	91 dB (1 W/1 m)
Maximum SPL	108 dB (Pmax/1 m)
Frequency response	180 Hz – 18 kHz
Driver dimensions	10 x 2" (51 mm) woofer, 1 x 1" (25 mm) tweeter
Dispersion at 1000 Hz	180° (H), 70° (V)
Dimensions	802 mm x 75 mm x 69 mm
Protection	IP 55
Weight	3.5 kg
Material	Aluminum
Colour	White (RAL 9016)
Additional accessory	MB1 wall mount bracket


COM SLIM 50

SLIM BODY ALUMINIUM COLUMN LOUDSPEAKERS




Frequency response

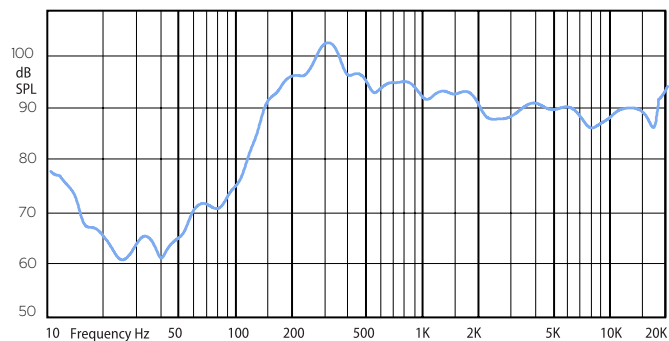

Impedance

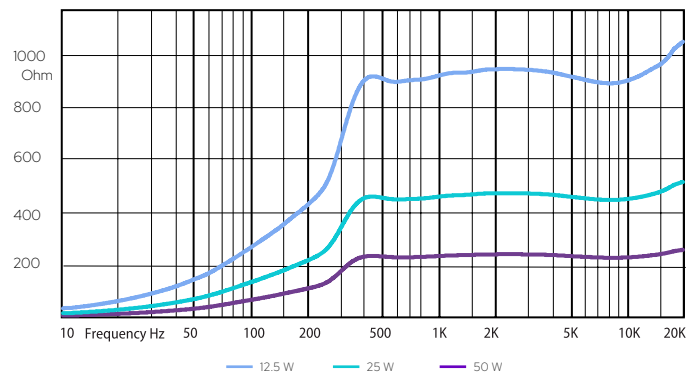

Horizontal/vertical polar diagrams

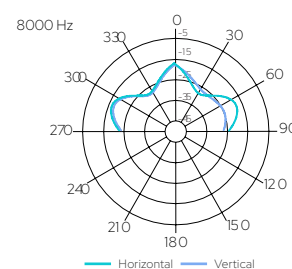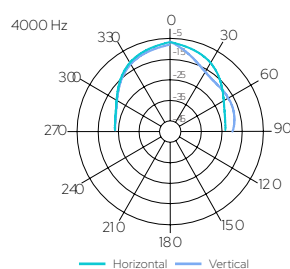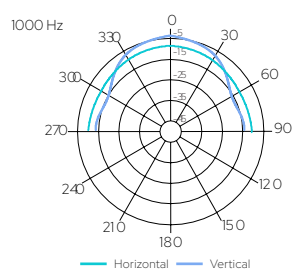

Dimensions



75 mm



69 mm



802 mm