

# iLIVE 2 HEADSET

## Antenna diversity wireless microphone system

The iLive 2 headset antenna diversity wireless microphone system offers 32 selectable channels with automatic channel targeting and synchronization for reliable frequency management. The system package includes a high-performance microphone signal receiver, a bodypack transmitter, and a head-worn condenser microphone with a color-matched body design. Connectivity is provided via a jack-to-jack cable. Engineered for professional use, the system delivers stable wireless audio transmission ideal for stage performances and conference room applications.



Technical Specifications	iLIVE 2 wireless receiver
Power supply	12-15 V DC, 1.25 A
Output	Balanced XLR, unbalanced 6,3 mm TRS JACK
Receiver way	Two frequency conversion super-heterodynes
Intermediate frequency	10.7 MHz
Antenna	BNC
THD	< 0.7 %
Sensitivity	6 dB $\mu$ V
Image rejection	36 dB
Max. audio output	0 dB
Dimensions	45 mm x 210 mm x 206mm
Weight	1.3 kg
Material	Steel enclosure, aluminum front panel

# iLIVE 2BP

## iLIVE 2 UHF BODY PACK WIRELESS TRANSMITTER

The iLive 2 BP is a bodypack wireless transmitter featuring an integrated LCD display that provides real-time channel frequency and battery level monitoring. Designed for seamless compatibility with iLive 2 receiver systems, it ensures reliable wireless transmission with user-friendly status feedback for professional audio applications.




Technical Specifications	iLIVE 2BP
Carrier frequency range	606 MHz - 621 MHz
Modulation	FM
Channels	32
Frequency response	45 Hz - 18 KHz
S/N ratio	> 105 dB
Antenna	1/4 wave antenna
Transmitter power	3 mW
Working range	60 m (Note: actual range depends on RF signal absorption, reflection and interference)
Battery	2 x 1,5 V AA alkaline battery
Dimensions	110 mm x 64 mm x 25 mm
Weight	76 g
Material	Plastic

# iLIVE 12HM

## MICROPHONE FOR iLIVE 1 & iLIVE 2 BODY PACK TRANSMITTERS

The iLive HM features an ultra-small 3.0 mm electret condenser capsule, offering precise and natural vocal pickup. Designed for low-profile, hands-free use, it's well-suited for speech and active performance environments. The lightweight construction ensures long-term wearing comfort. For use exclusively with iLive 1 and iLive 2 bodypack wireless transmitters.

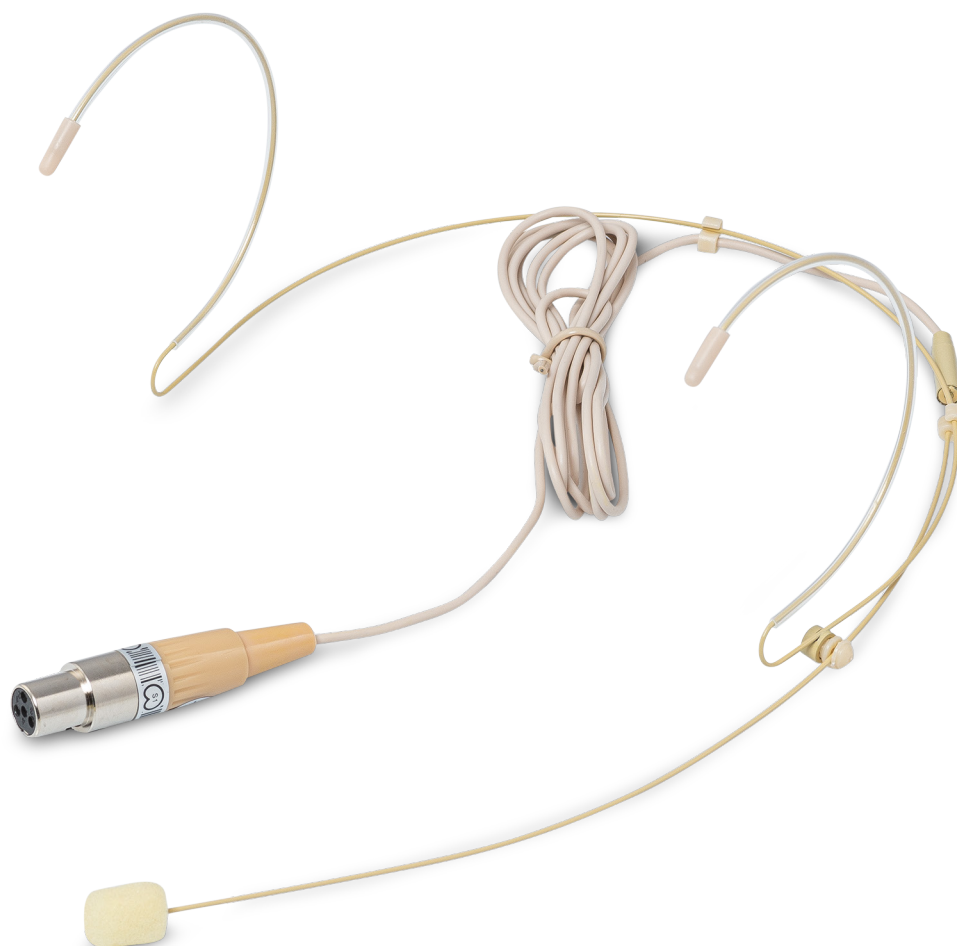

Technical Specifications	iLIVE 12HM
Capsule type	Condenser
Impedance	200 $\Omega$
Sensitivity	-47 dB
Frequency response	45 Hz - 18 KHz
Connector	4-pin mini XLR
Phantom power voltage	5 V DC
Cable length	1 m
Weight	15 g
Colour	Skin (RAL 1014)
Accessories	Windscreen