

iSpeak 5

PLASTIC SURFACE MOUNT LOUDSPEAKER

The iSpeak 5 is a constant voltage cabinet loudspeaker with a HIPS plastic enclosure, designed for easy surface mounting on walls or ceilings. It incorporates a 5" full-range driver and offers excellent speech intelligibility along with balanced performance for background music. Its compact, low-profile form factor makes it ideal for installations where visual impact must be minimized.




Technical Specifications	iSpeak 5
Rated power	6 W
Transformer power taps	6 W - 3 W - 1.5 W
Sensitivity	90 dB (1 W / 1 m)
Max. SPL	102 dB (Pmax / 1 m at 2834 kHz)
Frequency Response	70 Hz - 18 kHz
Dispersion at 1000 Hz	180° (H), 140° (V)
Driver dimensions	5" (127 mm)
Dimensions	265 mm x 165 mm x 72 mm
Weight	1.2 kg
Material	Polypropylene plastic, steel grill
Colour	White (RAL 9016)

iSpeak 5


PLASTIC SURFACE MOUNT LOUDSPEAKER






Frequency response

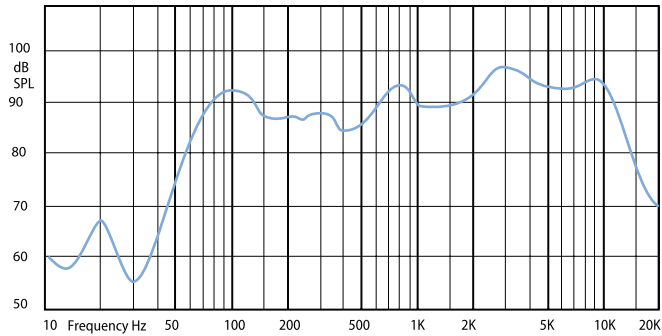

Impedance

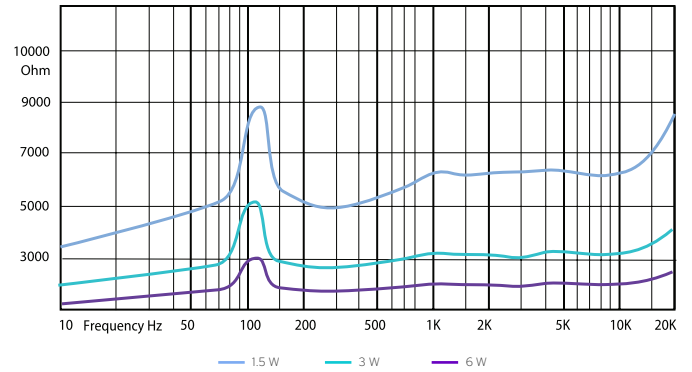

Horizontal/vertical polar diagrams

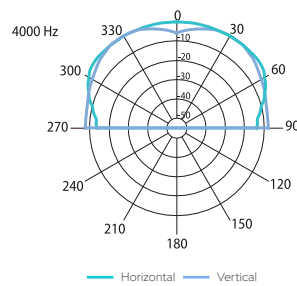

Dimensions

