

iSpeak 5EN

VOICE EVACUATION PLASTIC SURFACE MOUNT LOUDSPEAKER

iSpeak 5EN is a compact HIPS plastic cabinet loudspeaker designed for constant voltage speaker installation systems. It features a 5" integrated full-range driver, delivering clear and intelligible sound for both speech and background music applications. The unit supports effortless wall or ceiling mounting and complies with the EN54-24 standard, making it suitable for voice alarm systems. Its modern, low-profile design ensures minimal visual impact, ideal for environments where aesthetic integration is critical.




AMC 2017 - 02
Revision 2019-03-20
EN54-24:2008
1438-CPR-0508
ISSUE DATE: 17
TYPE A
DOP No.: AMC-1612

Technical Specifications	iSpeak 5EN
Rated power	6 W
Transformer power taps	6 W - 3 W - 1.5 W
Transformer impedance	1,6 k Ω - 3,3 k Ω - 6,6 k Ω
Sensitivity	79 dB (1 W / 4 m)
Maximum SPL	87 dB (Pmax / 4 m)
Frequency Response	200 Hz - 12 kHz
Dispersion at 500 Hz	230° (H), 230° (V)
Dispersion at 1000 Hz	180° (H), 173° (V)
Dispersion at 2000 Hz	113° (H), 115° (V)
Dispersion at 4000 Hz	75° (H), 75° (V)
Driver dimensions	5" (127 mm)
Operating temperature	-10°C - +35°C
Dimensions	265 mm x 165 mm x 72 mm
Weight	1.2 kg
Material	Polypropylene plastic, steel grill
Colour	White (RAL 9016)


iSpeak 5EN

VOICE EVACUATION PLASTIC SURFACE MOUNT LOUDSPEAKER

Frequency response

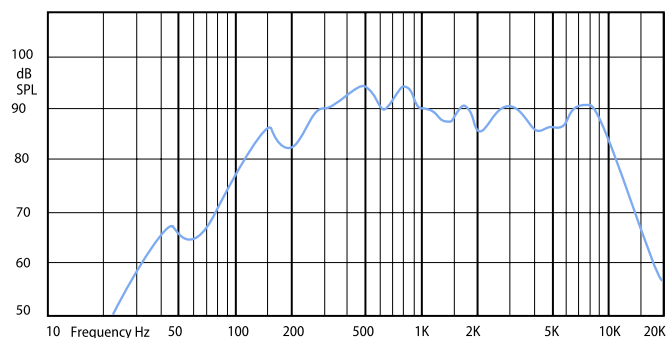

Impedance

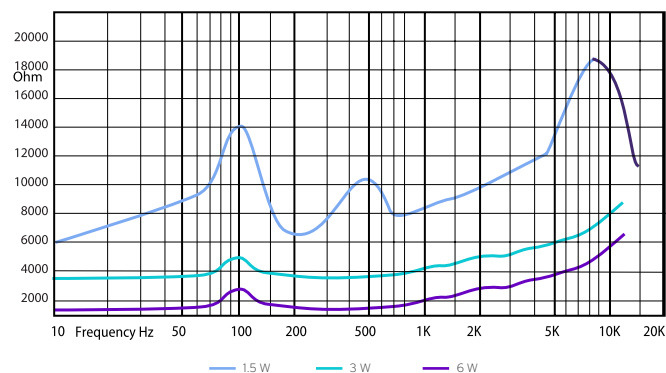

Dimensions

