

PCR 5

ABS PLASTIC CEILING LOUDSPEAKER

The PCR 5 loudspeaker is equipped with a specially designed 16 Ω voice coil, allowing greater flexibility in system configurations. Two speakers can be connected in parallel to achieve an 8 Ω load, or four speakers can be connected in parallel to match a 4 Ω load—ideal for use with professional audio amplifiers or standard stereo receivers. This design enables efficient chaining of multiple speakers in a single system without compromising impedance requirements.




Technical Specifications	PCR 5
Rated power	25 W
Impedance	16 Ω
Sensitivity	89 dB (1 W / 1 m)
Maximum SPL	101 dB (Pmax / 1 m) at 15694 Hz
Frequency response	80 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical
Driver dimensions	5" (130 mm) woofer, 0.5" (13 mm) tweeter, coaxial
Dimensions	Ø 200 mm x 70 mm
Weight	0.85 kg
Material	ABS plastic, steel grill
Colour	White (RAL 9016)


PCR 5

ABS PLASTIC CEILING LOUDSPEAKER

Frequency response



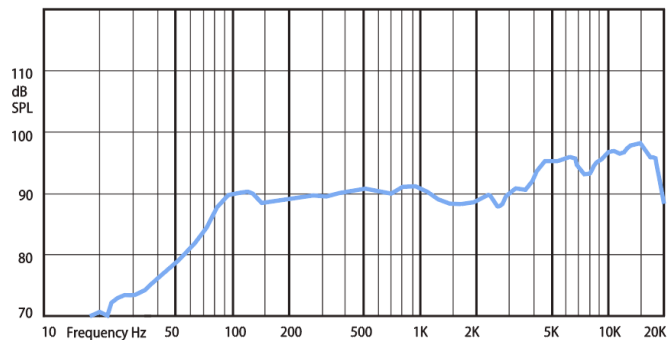


Impedance

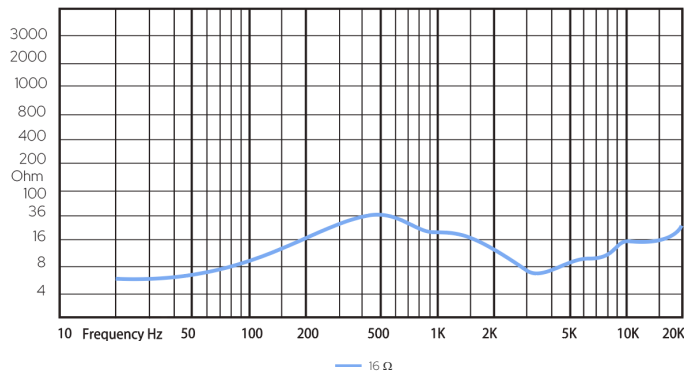


Horizontal/vertical polar diagrams

1000 Hz



Dimensions



Ø 200 mm



70 mm



Cutting Ø 170 mm