

04 / 05

WALL MOUNT PLASTIC LOUDSPEAKERS

The 04 and 05 loudspeakers provide a highly responsive woofer, minimalist design, and smart mounting brackets. The two-way speaker design, featuring a crossover and a highly responsive woofer diaphragm, delivers clear and rich sound at any volume. Built-in 100 V transformer and 16 Ω power tap make these loudspeakers suitable for background music and public address systems, as well as for home use. Feel confident in outdoor use – they are IP 55 rated and suitable for outdoor conditions. The loudspeakers can be mounted vertically and horizontally, the logo can be adjusted depending on the loudspeakers' position. Smart mounting brackets allow for easy mounting and adjustment of the loudspeakers.




Technical Specifications	04	05
Rated power	30 W RMS	40 W RMS
Transformer power taps	20 W - 10 W - 5 W - 16 Ω	30 W - 15 W - 7,5 W - 16 Ω
Sensitivity	87 dB (1 W/1 m)	90 dB (1 W/1 m)
Maximum SPL	106 dB (Pmax/1m) at 840 Hz	110 dB (Pmax/1m) at 12 kHz
Frequency response	85 Hz - 20 kHz	80 Hz - 20 kHz
Driver dimensions	4" (101 mm) woofer, 1" (2,54 mm) tweeter	5" (127 mm) woofer, 1" (2,54 mm) tweeter
Dispersion at 1000 Hz	130° (H), 120° (V)	
Dimensions (L x W x H)	150 mm x 145 mm x 200 mm	180 mm x 160 mm x 230 mm
Protection	IP55	
Weight	2 kg	2.1 kg
Material	Housing - plastic, grill - aluminum, mounting bracket - steel	
Colour	White (RAL9016), Black (RAL9017)	


04 / 05

WALL MOUNT PLASTIC LOUDSPEAKERS

Frequency response
04 LOUDSPEAKER

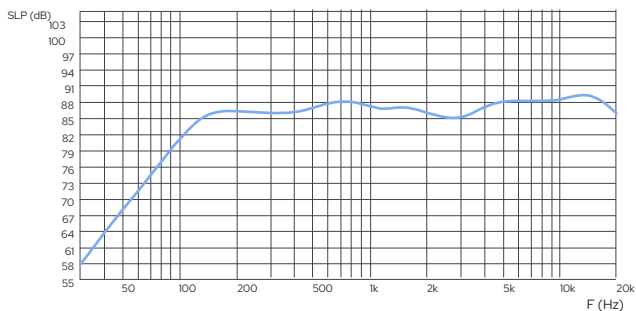


05 LOUDSPEAKER





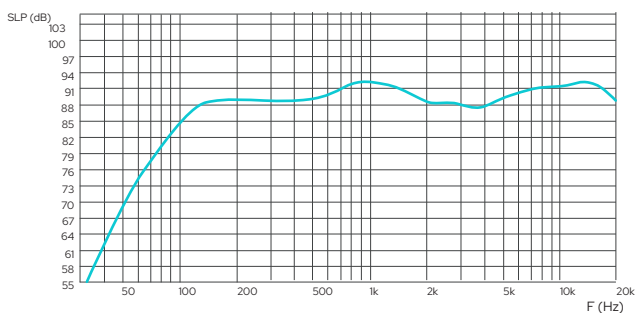


Horizontal/vertical polar diagrams

04 LOUDSPEAKER



05 LOUDSPEAKER



— Horizontal — Vertical


— Horizontal — Vertical

Dimensions



04 145 mm

05 160 mm

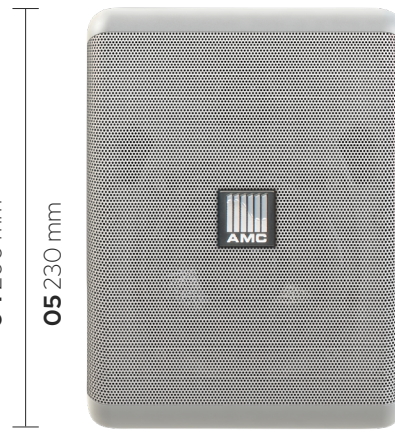

04 200 mm

05 230 mm

04 150 mm

05 180 mm