


# 100 V Line Transformers

## ACCESSORIES FOR LOUDSPEAKER INSTALLATION

Transformers for 100 V speaker lines with secondary winding for 8Ω speakers.  
Speaker line maximum load - 10W, 20W, 30W, 50W

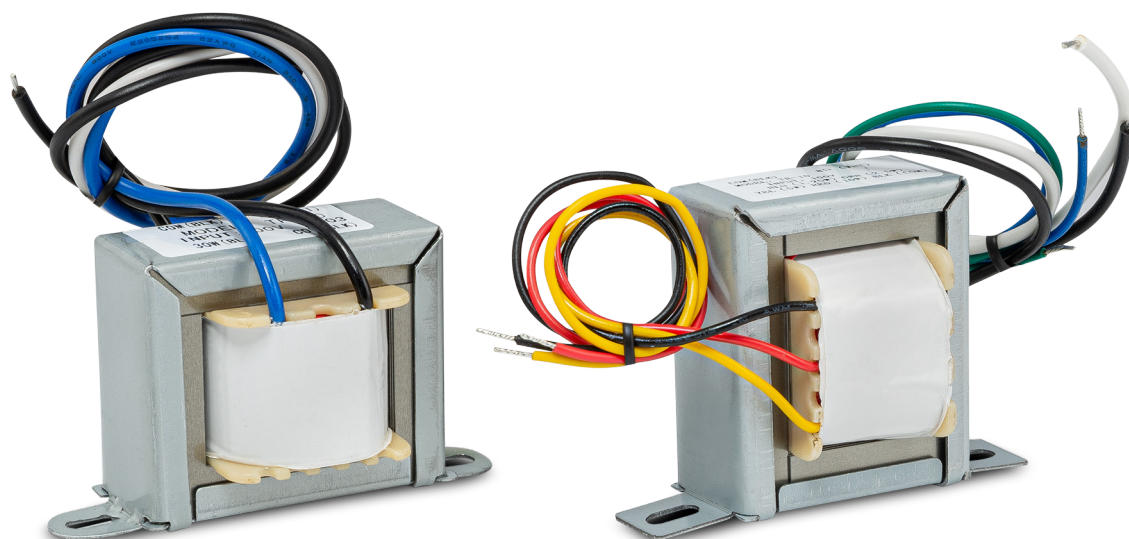

Technical Specifications	TR-10	TR-20	TR-30	TR-50
Power	10 W	20 W	30 W	50W
Transformer power taps	10 - 5 - 2.5 - 1.25 W	20 - 10 - 5 - 2.5 W	30 W	50W
Load for secondary winding	8 Ω	8 Ω	8 Ω	8 Ω
Weight	0.3 kg	0.3 kg	0.3 kg	0.6 kg
Dimensions	50 x 43 x 40 mm	50 x 43 x 43 mm	50 x 43 x 41 mm	60 x 50 x 52 mm
Cable length	200 m	200 m	190 m	200 m